# Scheda Dati

016P3P22F
Pulsante di abilitazione, 3 posizioni, 2 N.O.+2 N.C terminali Faston 2.8x0.5





## Caratteristiche

| | |
|---|---|
| **Gamma** | Pulsanti di abilitazione a 3 posizioni Ø 16 mm |
| **Componente** | Senza guardia, terminali faston |
| **Codice** | 016P3P22F |
| **Descrizione** | Pulsante di abilitazione, 3 posizioni, 2 N.O.+2 N.C |
| **Colore** | Nero |
| **Peso** | 35,0 |
| **Tariffa doganale** | 85365080 |
| **GTIN** | 8052878001865 |

## Dati tecnici

| | |
|---|---|
| **Approvals** | CE, (UL-CSA Microswitch only) |
| **Compliance with standards** | IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161 |
| **Operating temperatures** | -30° ÷ +70°C |
| **Protection degree** | IP40 - IP66 with 016GP28+020CGS (IEC-EN60529) |
| **Protection against impact** | IK06 (IEC-EN62262) |
| **Mechanical durability** | Position 1-2: 1.000.000 operations |
| **Mechanical durability** | Position 2-3: 500.000 operations |
| **Safety Parameters** | B10d:1.000.000 oper. pos.2-3 (UNI-EN-ISO 13849-1) |
| **Fixing diameter** | 16.5mm - Thickness 1÷6mm |
| **Tightening torque** | 0.6 ÷ 0.8Nm (5.3÷7.1 Lb-in) |
| **Rated insulation voltage** | Ui 300V - Uimp 2.5KV (IEC-EN60947-1) |
| **Protection against electric shock** | Class I (IEC-EN61140) |
| **Microswitches electrical ratings** | Vn 250V max AC-DC, In 5Amax, Ith 10A, Ui 300V |
| **Microswitches electrical perfomances** | 20.000 operations with load 250V-5A-cosphi 0.8 |
| **Actuating forces** | Position 1-2: 10N Position 2-3: 25N |
| **Microswitch** | 1NO - 1NC change over, snap action |
| **Warranty period** | 18 months |

# Disegni tecnici




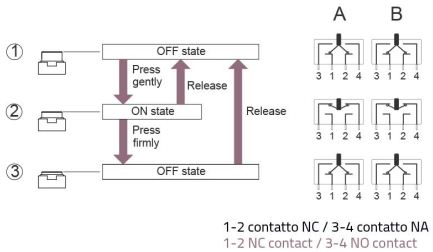


1-2 contatto NC / 3-4 contatto NA
1-2 NC contact / 3-4 NO contact