

Datenblatt

020MT1P2T21A

Steuerknüppel, 4 Positionen, 1 Permanent 2 Temporär, 1 N.C. + 2 N.O., H 55






Merkmale

| | |
|------------------------|--|
| Baureihe | Manipulatoren Ø 22 |
| Komponenten | Spezial-Steuerknüppel, 3 Positionen H 55 mm |
| Artikel-Nr. | 020MT1P2T21A |
| Beschreibung | Steuerknüppel, 4 Positionen, 1 Permanent 2 Temporär, 1 N.C. + 2 N.O., H 55 |
| Farbe | Grigio RAL7016 |
| Gewicht - gr | 92,0 |
| Zolltarifnummer | 85365080 |
| GTIN | 8052878067298 |

Dati tecnici

| | |
|---------------------------------------|--|
| Approvals | CE, UL, CSA |
| Compliance with standards | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards | UNI CEI EN 45545-2, CEI EN 61373 |
| Operating temperatures | -40° ÷ +70°C |
| Protection degree | IP66 - IP69 (IEC-EN60529) |
| Protection against impact | IK03 (IEC-EN62262) |
| Mechanical durability | 1.000.000 Operations |
| Shock resistance | 30g duration=18ms (EN-IEC 60068-2-27) |
| Shock resistance | 50g duration=11ms (EN-IEC 60068-2-27) |
| Vibration resistance | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Material | PA Polyamide |
| Cap or bellow material | Silicon rubber |
| Locking ring material | Zamak zinc alloy |
| Fixing diameter | 22.5mm - Thickness 1÷6mm |
| Tightening torque | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| Contact block | Included |
| Contact blocks characteristics | See items 020GE20-020E10-020E01 |
| Warranty period | 18 months |

Disegni tecnici

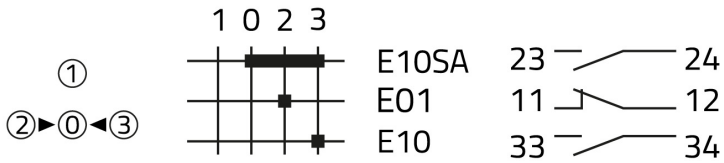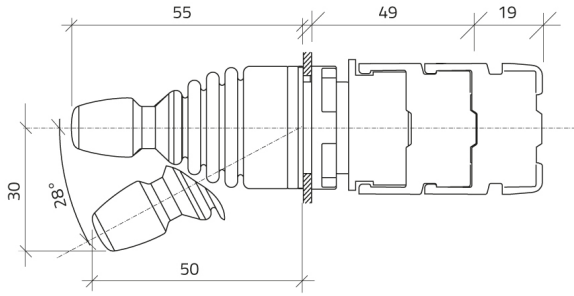

020G
020E10SA
020E01
020E10

