

# Datenblatt

020PD9

Lampenhalterung BA9S, Direktversorgung



## Merkmale


<b>Baureihe</b>	Lampenhalterung BA9S Ø 22
<b>Komponenten</b>	Lampenhalterung BA9S
<b>Artikel-Nr.</b>	020PD9
<b>Beschreibung</b>	Lampenhalterung BA9S, Direktversorgung
<b>Farbe</b>	Grigio RAL7016
<b>Gewicht - gr</b>	16,1
<b>Zolltarifnummer</b>	85365080
<b>GTIN</b>	8052878005177

## Technische Daten

<b>Approvals</b>	CE, UL, CSA
<b>Compliance with standards</b>	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
<b>Compliance with standards</b>	UNI CEI EN 45545-2, CEI EN 61373
<b>Operating temperatures</b>	-40° ÷ +70°C
<b>Environmental operating values</b>	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
<b>Protection degree</b>	IP20 (IEC-EN60529)
<b>Shock resistance</b>	30g duration=18ms (EN-IEC 60068-2-27)
<b>Shock resistance</b>	50g duration=11ms (EN-IEC 60068-2-27)
<b>Vibration resistance</b>	5g f= 2...500Hz (EN-IEC 60068-2-6)
<b>Housing material</b>	PA Polyamide
<b>Screw material</b>	Zinc plated steel
<b>Bulb-holder clamping spring material</b>	Stainless steel AISI 304
<b>Terminal screw</b>	Tightening torque 0.8÷1 Nm (IEC-EN60947-1)
<b>Terminal screw head shape</b>	Combined:cross Phillips2 or slotted flat D.5mm max
<b>Terminal screw connections</b>	min 1x0.5mm <sup>2</sup> (20AWG) - max 2x2.5mm <sup>2</sup> (14AWG)
<b>Cable lugs</b>	Fork type "spring spade" for screw M3.5 / W=6.4mm
<b>Bulb type</b>	Ba9S 400V - 2W max (not included)
<b>Full voltage power supply</b>	IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max
<b>Rated insulation voltage</b>	Ui 690V - Uimp 4KV (IEC-EN60947-1)
<b>Protection against electric shock</b>	Class II (IEC-EN61140)
<b>Warranty period</b>	18 months

# Technische Zeichnungen

020

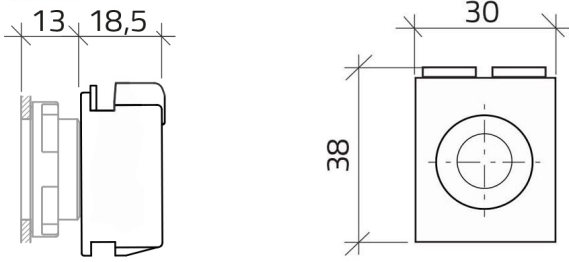

032

