

## Fiche technique

020PD9

Porte-lampe BA9S, alimentation directe



## Caractéristiques


Portée	Porte-lampe BA9S Ø 22
Composant	Porte-lampe BA9S
Code	020PD9
Désignation des marchandises	Porte-lampe BA9S, alimentation directe
Couleur	Grigio RAL7016
Poids	16,1
Tarif douanier	85365080
GTIN	8052878005177

## Données techniques

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-40° ÷ +70°C
Environmental operating values	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Protection degree	IP20 (IEC-EN60529)
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Housing material	PA Polyamide
Screw material	Zinc plated steel
Bulb-holder clamping spring material	Stainless steel AISI 304
Terminal screw	Tightening torque 0.8÷1 Nm (IEC-EN60947-1)
Terminal screw head shape	Combined:cross Phillips2 or slotted flat D.5mm max
Terminal screw connections	min 1x0.5mm <sup>2</sup> (20AWG) - max 2x2.5mm <sup>2</sup> (14AWG)
Cable lugs	Fork type "spring spade" for screw M3.5 / W=6.4mm
Bulb type	Ba9S 400V - 2W max (not included)
Full voltage power supply	IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Warranty period	18 months

## Dessins techniques

020

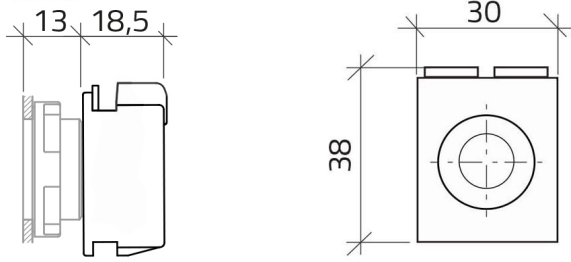

032

