

Datenblatt

020PD9TO

Lampenhalterung BA9S, Ringöse



Merkmale


Baureihe	Lampenhalterung BA9S Ø 22
Komponenten	Lampenhalterung BA9S
Artikel-Nr.	020PD9TO
Beschreibung	Lampenhalterung BA9S, Ringöse
Farbe	Grigio RAL7016
Gewicht - gr	16,0
Zolltarifnummer	85365080
GTIN	8052878066369

Technische Daten

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-40° ÷ +70°C
Environmental operating values	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Protection degree	IP20 (IEC-EN60529)
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Housing material	PA Polyamide
Screw material	Zinc plated steel
Flange clamping spring material	Stainless steel AISI 304
Terminal screw	Tightening torque 0.8÷1 Nm (IEC-EN60947-1)
Terminal screw head shape	Combined:cross Phillips2 or slotted flat D.5mm max
Terminal screw with safety washer	Schnorr washer"UV"type - for ring terminal lug
Cable lugs	Ring terminal M3.5 - ext.diameter 6.2mm max
Bulb type	Ba9S 400V - 2W max (not included)
Full voltage power supply	IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Warranty period	18 months

Technische Zeichnungen

020

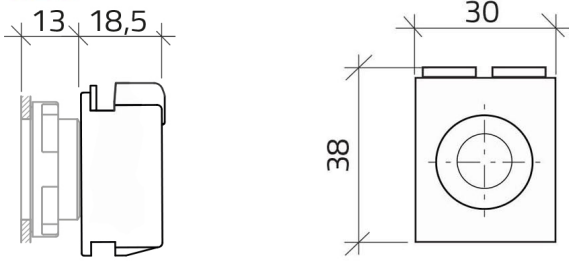

032

