

Hoja de datos

020PD9TO

Portalámpara BA9S, terminal de anillo



Características


| | |
|------------------|---------------------------------------|
| Rango | Portalámpara ba9s Ø 22 |
| Componente | Portalámpara BA9S |
| Código | 020PD9TO |
| Descripción | Portalámpara BA9S, terminal de anillo |
| Color | Grigio RAL7016 |
| Peso | 16,0 |
| Arancel aduanero | 85365080 |
| GTIN | 8052878066369 |

Datos técnicos

| | |
|-----------------------------------|--|
| Approvals | CE, UL, CSA |
| Compliance with standards | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards | UNI CEI EN 45545-2, CEI EN 61373 |
| Operating temperatures | -40° ÷ +70°C |
| Environmental operating values | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30) |
| Protection degree | IP20 (IEC-EN60529) |
| Shock resistance | 30g duration=18ms (EN-IEC 60068-2-27) |
| Shock resistance | 50g duration=11ms (EN-IEC 60068-2-27) |
| Vibration resistance | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Housing material | PA Polyamide |
| Screw material | Zinc plated steel |
| Flange clamping spring material | Stainless steel AISI 304 |
| Terminal screw | Tightening torque 0.8÷1 Nm (IEC-EN60947-1) |
| Terminal screw head shape | Combined:cross Phillips2 or slotted flat D.5mm max |
| Terminal screw with safety washer | Schnorr washer"UV"type - for ring terminal lug |
| Cable lugs | Ring terminal M3.5 - ext.diameter 6.2mm max |
| Bulb type | Ba9S 400V - 2W max (not included) |
| Full voltage power supply | IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max |
| Rated insulation voltage | Ui 690V - Uimp 4KV (IEC-EN60947-1) |
| Protection against electric shock | Class II (IEC-EN61140) |
| Warranty period | 18 months |

Dibujos técnicos

020

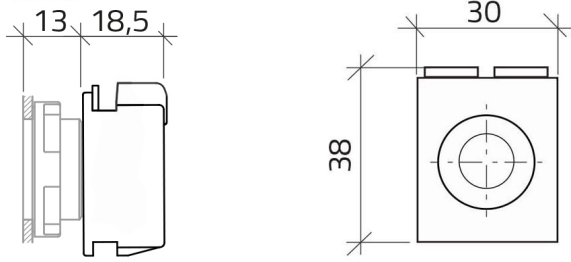

032

