

Scheda Dati

020PD9TO

Portalampada BA9S, terminale ad occhiello



Caratteristiche


Gamma	Portalampada BA9S Ø 22
Componente	Portalampada BA9S
Codice	020PD9TO
Descrizione	Portalampada BA9S, terminale ad occhiello
Colore	Grigio RAL7016
Peso	16,0
Tariffa doganale	85365080
GTIN	8052878066369

Dati tecnici

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-40° ÷ +70°C
Environmental operating values	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Protection degree	IP20 (IEC-EN60529)
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Housing material	PA Polyamide
Screw material	Zinc plated steel
Flange clamping spring material	Stainless steel AISI 304
Terminal screw	Tightening torque 0.8÷1 Nm (IEC-EN60947-1)
Terminal screw head shape	Combined:cross Phillips2 or slotted flat D.5mm max
Terminal screw with safety washer	Schnorr washer"UV"type - for ring terminal lug
Cable lugs	Ring terminal M3.5 - ext.diameter 6.2mm max
Bulb type	Ba9S 400V - 2W max (not included)
Full voltage power supply	IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Warranty period	18 months

Disegni tecnici

020

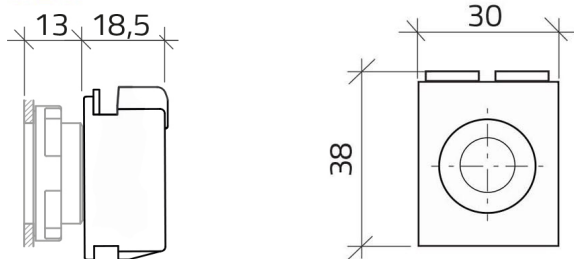

032

