

Scheda Dati

020SMTLOAD  
Valovääntökytkin, Oranssi, 3-asentoinen, Cam O, jousipalautus oikealta, valo




Caratteristiche

|                  |                                                                              |
|------------------|------------------------------------------------------------------------------|
| Range            | Valaistut valitsimet Ø 22                                                    |
| Componente       | 3-asentoinen vääntökytkin                                                    |
| Code             | 020SMTLOAD                                                                   |
| Kuvaus           | Valovääntökytkin, Oranssi, 3-asentoinen, Cam O, jousipalautus oikealta, valo |
| Väriä            | Arancio                                                                      |
| Peso             | 27,0                                                                         |
| Tariffa doganale | 85365080                                                                     |
| GT               | 8052878066659                                                                |




Dati tecnici

|                                            |                                                   |
|--------------------------------------------|---------------------------------------------------|
| Approvals                                  | CE                                                |
| Compliance with standards                  | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2  |
| Compliance with standards                  | UNI CEI EN 45545-2                                |
| Operating temperatures                     | -40° ÷ +70°C                                      |
| Environmental operating values             | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)      |
| Protection degree                          | IP65 (IEC-EN60529)                                |
| Protection against impact                  | IK03 (IEC-EN62262)                                |
| Mechanical durability                      | 1.000.000 Operations                              |
| Shock resistance                           | 30g duration=18ms (EN-IEC 60068-2-27)             |
| Vibration resistance                       | 5g f= 2...500Hz (EN-IEC 60068-2-6)                |
| Contact blocks configuration               | Max no. 2 blocks (1+1)                            |
| Housing material                           | PA Polyamide                                      |
| Knob or lever material                     | PC Polycarbonate                                  |
| Locking ring material                      | Zamak zinc alloy                                  |
| Fixing diameter                            | 22.5mm - Thickness 1÷6mm                          |
| Tightening torque                          | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                       |
| Illuminated selector switch (all versions) | It is mandatory to use LED bulbs type 010BA9SLxxx |
| Protection against electric shock          | Class II (IEC-EN61140)                            |
| Warranty period                            | 18 months                                         |

Disegni tecnici


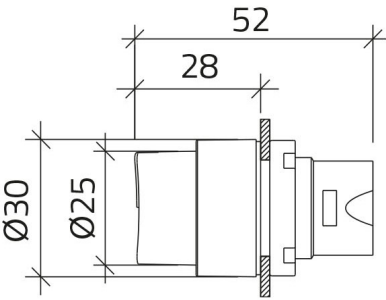


CAM 0



020E10  
020E10  
020G

CAM 0



020E01  
020E10  
020G

