

Scheda Dati

020STACTWD2  
Avainvalitsin, 3-asentoinen, avain K95, Cam T, avaimen poisto I, jousipalautus oikealta, metalli





Caratteristiche

|                  |                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------|
| Range            | Avainvalitsimet Ø 22 - metallirengas                                                             |
| Componente       | 3-asentoinen vääntökytkin                                                                        |
| Code             | 020STACTWD2                                                                                      |
| Kuvaus           | Avainvalitsin, 3-asentoinen, avain K95, Cam T, avaimen poisto I, jousipalautus oikealta, metalli |
| Peso             | 95,0                                                                                             |
| Tariffa doganale | 85365080                                                                                         |
| GT               | 8052878021313                                                                                    |



Dati tecnici

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| Approvals                         | CE                                               |
| Compliance with standards         | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards         | UNI CEI EN 45545-2                               |
| Operating temperatures            | -25° ÷ +65°C                                     |
| Environmental operating values    | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)     |
| Protection degree                 | IP65 (IEC-EN60529)                               |
| Protection against impact         | IK03 (IEC-EN62262)                               |
| Mechanical durability             | 1.000.000 Operations                             |
| Shock resistance                  | 30g duration=18ms (EN-IEC 60068-2-27)            |
| Shock resistance                  | 50g duration=11ms (EN-IEC 60068-2-27)            |
| Vibration resistance              | 5g f= 2...500Hz (EN-IEC 60068-2-6)               |
| Contact blocks configuration      | Max no. 4 blocks (2+2)                           |
| Knob or lever material            | PC Polycarbonate                                 |
| External bezel material           | Chromed zinc alloy                               |
| Locking ring material             | Zamak zinc alloy                                 |
| Fixing diameter                   | 22.5mm - Thickness 1÷6mm                         |
| Tightening torque                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                      |
| Protection against electric shock | Class II (IEC-EN61140)                           |
| Warranty period                   | 18 months                                        |

Disegni tecnici

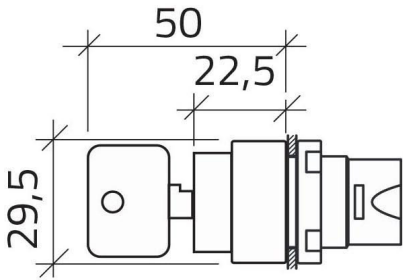

CAM T



020E01  
020E10  
020G

