

Scheda Dati

020STAMLORWD
Seletor luminoso con manípulo, vermelho, 3 posições, Cam O, retorno a mola da dir, metal



Caratteristiche



Gama	Seletores luminosos Ø 22 - anel em metal
Componente	Seletores com manípulo de 3 posições
Código	020STAMLORWD
Descrição	Seletor luminoso com manípulo, vermelho, 3 posições, Cam O, retorno a mola da dir, metal
Cor	Rosso
Peso	38,0
Tariffa doganale	85365080
GTIN	8052878024888

Dati tecnici



Approvals	CE
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2
Operating temperatures	-25° ÷ +65°C
Environmental operating values	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Protection degree	IP65 (IEC-EN60529)
Protection against impact	IK03 (IEC-EN62262)
Mechanical durability	1.000.000 Operations
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Contact blocks configuration	Max no. 2 blocks (1+1)
Knob or lever material	PC Polycarbonate
External bezel material	Chromed zinc alloy
Locking ring material	Zamak zinc alloy
Fixing diameter	22.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Illuminated selector switch (all versions)	It is mandatory to use LED bulbs type 010BA9SLxxx
Protection against electric shock	Class II (IEC-EN61140)

Warranty period	18 months
-----------------	-----------

Disegni tecnici



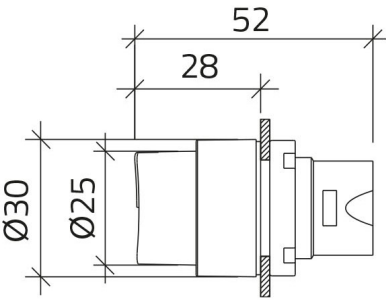


CAM 0



020E10
020E10
020G

CAM 0



020E01
020E10
020G

