


Scheda Dati

030M11

Ylimääräinen mikrokytkin N.O.+N.C., pitkillä ruuveilla





Caratteristiche

Range	Ohjaussauvat Ø 30
Componente	Ylimääräinen mikrokatkaisin
Code	030M11
Kuvaus	Ylimääräinen mikrokytkin N.O.+N.C., pitkillä ruuveilla
Väriä	Nero
Peso	8,0
Tariffa doganale	85365080
GT	8052878029296

Dati tecnici

Approvals	CE, UL, CSA
Microswitch contact form	SPDT (single pole double throw)
Microswitch terminals	Quick connect #250 (6.35mm)
Microswitch electrical ratings	250VAC - 15A (resistive load)
Microswitch electrical ratings	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
Microswitch electrical durability	100.000 operations
Microswitch contact resistance	<100mOhm
Microswitch insulating resistance	100MOhm - 500VDC
Microswitch dielectric strenght	1500VAC - 1minute
Microswitch operating temperature	-25° ÷ +85°C
Microswitch operating force	2N
Microswitch housing material	PBT black
Microswitch contact material	Silver alloy
Microswitch lever material	SUS 301 stainless steel
Warranty period	18 months

Disegni tecnici

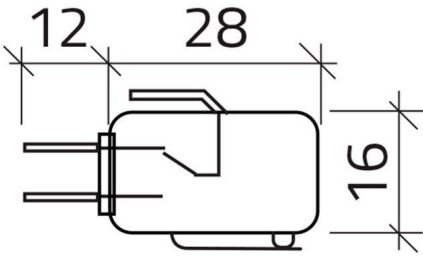

	8	6	4	2	0	1	3	5	7
MICROINTERRUTTORE MICROSWITCHES	1								
2									
3									
4									

