


Fiche technique

030M11

Microinterrupteur supplémentaire, N.O.+N.C., avec vis longues





Caractéristiques

Portée	Manipulateurs Ø 30
Composant	Microinterrupteur supplémentaire
Code	030M11
Désignation des marchandises	Microinterrupteur supplémentaire, N.O.+N.C., avec vis longues
Couleur	Nero
Poids	8,0
Tarif douanier	85365080
GTIN	8052878029296

Données techniques

Approvals	CE, UL, CSA
Microswitch contact form	SPDT (single pole double throw)
Microswitch terminals	Quick connect #250 (6.35mm)
Microswitch electrical ratings	250VAC - 15A (resistive load)
Microswitch electrical ratings	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
Microswitch electrical durability	100.000 operations
Microswitch contact resistance	<100mOhm
Microswitch insulating resistance	100MOhm - 500VDC
Microswitch dielectric strenght	1500VAC - 1minute
Microswitch operating temperature	-25° ÷ +85°C
Microswitch operating force	2N
Microswitch housing material	PBT black
Microswitch contact material	Silver alloy
Microswitch lever material	SUS 301 stainless steel
Warranty period	18 months

Dessins techniques

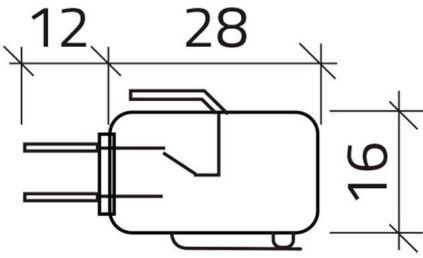

	⑦	⑤	③	①	①	②	④	⑥	⑧
1									
2									
3									
4									

