


## Scheda Dati

030M11

Microinterruttore aggiuntivo, N.O.+N.C, con viti lunghe





## Caratteristiche

<b>Gamma</b>	Manipolatori Ø 30
<b>Componente</b>	Microinterruttore aggiuntivo
<b>Codice</b>	030M11
<b>Descrizione</b>	Microinterruttore aggiuntivo, N.O.+N.C, con viti lunghe
<b>Colore</b>	Nero
<b>Peso</b>	8,0
<b>Tariffa doganale</b>	85365080
<b>GTIN</b>	8052878029296

## Dati tecnici

<b>Approvals</b>	CE, UL, CSA
<b>Microswitch contact form</b>	SPDT (single pole double throw)
<b>Microswitch terminals</b>	Quick connect #250 (6.35mm)
<b>Microswitch electrical ratings</b>	250VAC - 15A (resistive load)
<b>Microswitch electrical ratings</b>	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
<b>Microswitch electrical durability</b>	100.000 operations
<b>Microswitch contact resistance</b>	<100mOhm
<b>Microswitch insulating resistance</b>	100MOhm - 500VDC
<b>Microswitch dielectric strenght</b>	1500VAC - 1minute
<b>Microswitch operating temperature</b>	-25° ÷ +85°C
<b>Microswitch operating force</b>	2N
<b>Microswitch housing material</b>	PBT black
<b>Microswitch contact material</b>	Silver alloy
<b>Microswitch lever material</b>	SUS 301 stainless steel
<b>Warranty period</b>	18 months

## Disegni tecnici

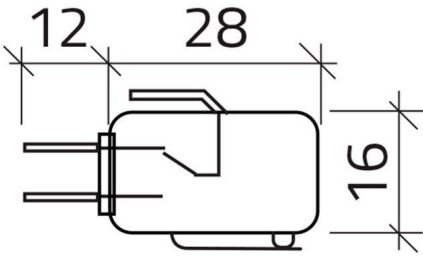

	8	6	4	2	0	1	3	5	7
MICROINTERRUTTORE									
MICROSWITCHES									
1									
2									
3									
4									

