
# Datasheet

030M2T22
Joystick, 2-position, 2 Spring Return, 2 N.O.+2 N.C.






## Features

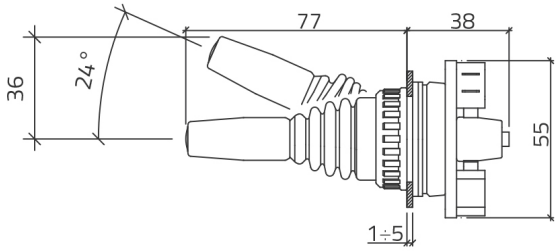
| | |
|---|---|
| **Range** | Joysticks Ø 30 |
| **components** | 2-position, spring return |
| **Code** | 030M2T22 |
| **Description** | Joystick, 2-position, 2 Spring Return, 2 N.O.+2 N.C. |
| **Colour** | Nero |
| **Weight - gr** | 213.0 |
| **Customs Tariff** | 85365080 |
| **GTIN** | 8052878029302 |


## Datasheet


| | |
|---|---|
| **Approvals** | CE, (UL-CSA Microswitch only) |
| **Compliance with standards** | IEC-ENC60947-1, IEC-EN60947-5-1 |
| **Operating temperatures** | -25° ÷ +65°C |
| **Protection degree** | IP65 (IEC-EN60529) |
| **Mechanical durability** | 2.000.000 Operations |
| **Cap or bellow material** | Silicon rubber |
| **Housing material** | PA Polyamide |
| **External bezel material** | Chromed zinc alloy |
| **Internal parts material** | Lever,springs,bushing - stainless steel AISI 304 |
| **Microswitches flange material** | Stainless steel AISI 304 |
| **Fixing diameter** | 30.5mm - Thickness 1÷6mm |
| **Tightening torque** | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| **Rated insulation voltage** | Ui 300V - Uimp 2.5KV (IEC-EN60947-1) |
| **Protection against electric shock** | Class II (IEC-EN61140) |
| **Microswitch contact form** | SPDT (single pole double trow) |
| **Microswitch terminals** | Quick connect #250 (6.35mm) |
| **Microswitch electrical ratings** | 250VAC - 15A (resistive load) |
| **Microswitch electrical ratings** | 250VDC - 0.3A / 125VDC - 0.6A (resistive load) |
| **Microswitch electrical durability** | 100.000 operations |
| **Warranty period** | 18 months |


## Technical drawings







| | ⑦ | ⑤ | ③ | ① | ⓪ | ② | ④ | ⑥ | ⑧ |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | | | | | | | |
| 2 | | | | | | | | | |
| 3 | | | | | | | | | |
| 4 | | | | | | | | | |

