


Datasheet

030M4T44

Joystick, 4-position, 4 Spring Return, 4 N.O.+4 N.C.









Features

Range	Joysticks Ø 30
components	4-position, spring return
Code	030M4T44
Description	Joystick, 4-position, 4 Spring Return, 4 N.O.+4 N.C.
Colour	Nero
Weight - gr	206.0
Customs Tariff	85365080
GTIN	8052878029333

Datasheet

Approvals	CE, (UL-CSA Microswitch only)
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	2.000.000 Operations
Cap or bellow material	Silicon rubber
Housing material	PA Polyamide
External bezel material	Chromed zinc alloy
Internal parts material	Lever, springs, bushing - stainless steel AISI 304
Microswitches flange material	Stainless steel AISI 304
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Rated insulation voltage	Ui 300V - Uimp 2.5KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Microswitch contact form	SPDT (single pole double throw)
Microswitch terminals	Quick connect #250 (6.35mm)
Microswitch electrical ratings	250VAC - 15A (resistive load)
Microswitch electrical ratings	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
Microswitch electrical durability	100.000 operations
Warranty period	18 months

Technical drawings

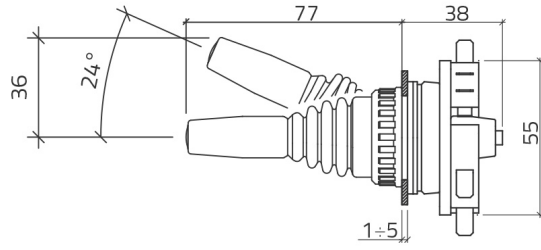

	8	6	4	2	0	1	3	5	7
MICROINTERRUTTORE MICROSWITCHES	1	2	3	4	5	6	7	8	9
2	10	11	12	13	14	15	16	17	18
3	19	20	21	22	23	24	25	26	27
4	28	29	30	31	32	33	34	35	36

