


Scheda Dati

030M4T44

Manipulador, 4 posições, 4 Instantâneos, 4 N.O.+4 N.C.








Caratteristiche

Gama	Manipuladores Ø 30
Componente	Manipuladores de 4 posições instantâneas
Código	030M4T44
Descrição	Manipulador, 4 posições, 4 Instantâneos, 4 N.O.+4 N.C.
Cor	Nero
Peso	206,0
Tariffa doganale	85365080
GTIN	8052878029333

Dati tecnici

Approvals	CE, (UL-CSA Microswitch only)
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	2.000.000 Operations
Cap or bellow material	Silicon rubber
Housing material	PA Polyamide
External bezel material	Chromed zinc alloy
Internal parts material	Lever, springs, bushing - stainless steel AISI 304
Microswitches flange material	Stainless steel AISI 304
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Rated insulation voltage	Ui 300V - Uimp 2.5KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Microswitch contact form	SPDT (single pole double throw)
Microswitch terminals	Quick connect #250 (6.35mm)
Microswitch electrical ratings	250VAC - 15A (resistive load)
Microswitch electrical ratings	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
Microswitch electrical durability	100.000 operations
Warranty period	18 months

Disegni tecnici

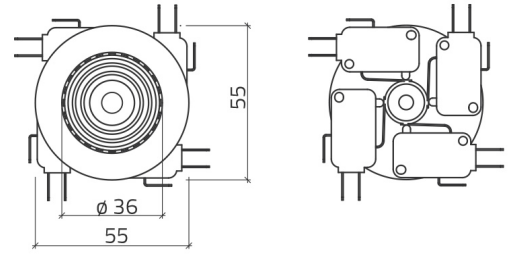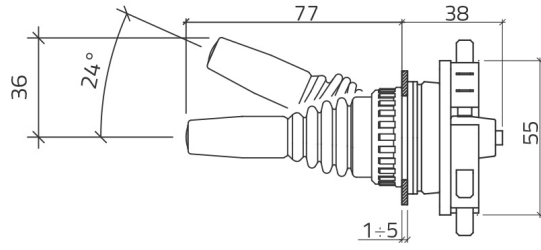

	8	6	4	2	0	1	3	5	7
MICROINTERRUTTORE MICROSWITCHES	1	2	3	4	5	6	7	8	0
2	0	1	2	3	4	5	6	7	8
3	8	7	6	5	4	3	2	1	0
4	7	6	5	4	3	2	1	0	8

