

## Scheda Dati

030MF2T

Joystick, inbouwmodel, 2 posities, 2 Tijdelijk






## Caratteristiche

|                         |  |
|-------------------------|--|
| <b>Bereik</b>           | Joysticks Ø 30                                 |
| <b>Componente</b>       | Joysticks 2 posities                           |
| <b>Rubriek</b>          | 030MF2T  |
| <b>Omschrijving</b>     | Joystick, inbouwmodel, 2 posities, 2 Tijdelijk |
| <b>Kleur</b>            | Nero   |
| <b>Peso</b>             | 54,0   |
| <b>Tariffa doganale</b> | 85365080                                       |
| <b>GTIN</b>             | 8052878029401                                  |

## Dati tecnici

|  |  |
|--|--|
| <b>Approvals</b>                         | CE, UL, CSA  |
| <b>Compliance with standards</b>         | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2   |
| <b>Compliance with standards</b>         | UNI CEI EN 45545-2, CEI EN 61373                   |
| <b>Operating temperatures</b>            | -25° ÷ +65°C                                       |
| <b>Protection degree</b>                 | IP65 (IEC-EN60529)                                 |
| <b>Protection against impact</b>         | IK04 (IEC-EN62262)                                 |
| <b>Mechanical durability</b>             | 1.000.000 Operations                               |
| <b>Shock resistance</b>                  | 30g duration=18ms (EN-IEC 60068-2-27)              |
| <b>Shock resistance</b>                  | 50g duration=11ms (EN-IEC 60068-2-27)              |
| <b>Vibration resistance</b>              | 5g f= 2...500Hz (EN-IEC 60068-2-6)                 |
| <b>Contact blocks configuration</b>      | Max no. 4 blocks (2+2)                             |
| <b>Material</b>                          | PA Polyamide                                       |
| <b>Cap or bellow material</b>            | Silicon rubber                                     |
| <b>External bezel material</b>           | Anodized aluminum                                  |
| <b>Internal parts material</b>           | Lever, springs, bushing - stainless steel AISI 304 |
| <b>Internal parts material</b>           | Sliding bushing made in brass                      |
| <b>Locking ring material</b>             | Zamak zinc alloy                                   |
| <b>Fixing diameter</b>                   | 30.5mm - Thickness 1÷6mm                           |
| <b>Tightening torque</b>                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                        |
| <b>Protection against electric shock</b> | Class I (IEC-EN61140)                              |
| <b>Warranty period</b>                   | 18 months  |

# Disegni tecnici

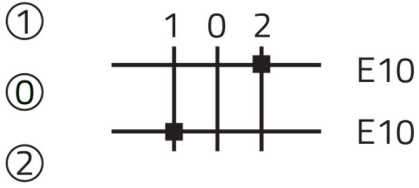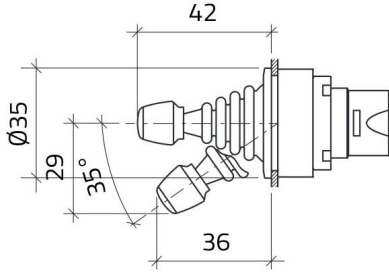

020E10  
020E10  
020G

