

## Scheda Dati

030MF4T

Ohjaussauva, uppoasennus, 4-asentoinen, 4 Väli aikaista







## Caratteristiche

Range	Ohjaussauvat Ø 30
Componente	Ohjaussauva 4-asentoinen
Code	030MF4T
Kuvaus	Ohjaussauva, uppoasennus, 4-asentoinen, 4 Väli aikaista
Väriä	Nero
Peso	54,0
Tariffa doganale	85365080
GT	8052878029425

## Dati tecnici

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Protection against impact	IK04 (IEC-EN62262)
Mechanical durability	1.000.000 Operations
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Contact blocks configuration	Max no. 4 blocks (2+2)
Material	PA Polyamide
Cap or bellow material	Silicon rubber
External bezel material	Anodized aluminum
Internal parts material	Lever, springs, bushing - stainless steel AISI 304
Internal parts material	Sliding bushing made in brass
Locking ring material	Zamak zinc alloy
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Protection against electric shock	Class I (IEC-EN61140)
Warranty period	18 months

# Disegni tecnici

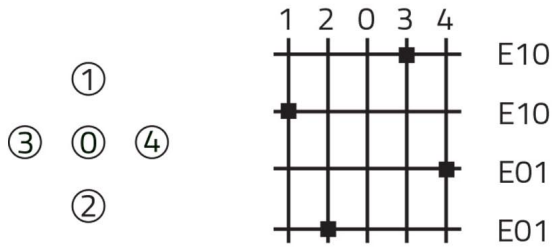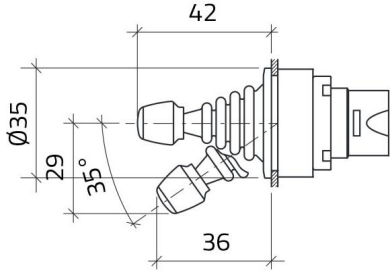

020E10  
020E10  
020E01  
020E01  
020G

