


Scheda Dati

030SCT2F14  
Avainvalitsin, 3-asentoinen, avain K95, Cam T, avaimen poisto II, 2 N.O.+2 N.C.




Caratteristiche

|                  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Range            | Avainvalitsimet Ø 30                                                            |
| Componente       | 3-asentoinen avainvalitsin                                                      |
| Code             | 030SCT2F14                                                                      |
| Kuvaus           | Avainvalitsin, 3-asentoinen, avain K95, Cam T, avaimen poisto II, 2 N.O.+2 N.C. |
| Peso             | 180,0                                                                           |
| Tariffa doganale | 85365080                                                                        |
| GT               | 8052878036065                                                                   |

Dati tecnici

|                                   |                                                    |
|-----------------------------------|----------------------------------------------------|
| Approvals                         | CE, (UL-CSA 030F1-030FA-030FC-030FAA-030FCR only)  |
| Compliance with standards         | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2   |
| Operating temperatures            | -25° ÷ +65°C                                       |
| Protection degree                 | IP65 (IEC-EN60529)                                 |
| Mechanical durability             | 1.000.000 Operations                               |
| Housing material                  | PA Polyamide                                       |
| Knob or lever material            | PC Polycarbonate                                   |
| External bezel material           | Chromed zinc alloy                                 |
| Housing material                  | PA Polyammide + chrome                             |
| Fixing diameter                   | 30.5mm - Thickness 1÷6mm                           |
| Tightening torque                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                        |
| Protection against electric shock | Class II (IEC-EN61140)                             |
| Contact block                     | Included                                           |
| Contact block characteristics     | See technical features of 030FAP - 030FCP - 030F1P |
| Warranty period                   | 18 months                                          |

Disegni tecnici

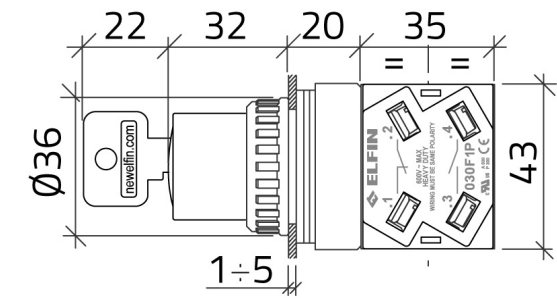

CAM T

