# Datasheet

030SCT2F1
Key selector switch, 3-position, K95 key, Cam T, key removal I-0-II, 2 N.O.+2 N.C.






## Features

| | |
|---|---|
| **Range** | Key selector switches Ø 30 |
| **components** | 3-position |
| **Code** | 030SCT2F1 |
| **Description** | Key selector switch, 3-position, K95 key, Cam T, key removal I-0-II, 2 N.O.+2 N.C. |
| **Weight - gr** | 187.0 |
| **Customs Tariff** | 85365080 |
| **GTIN** | 8052878036041 |

## Datasheet

| | |
|---|---|
| **Approvals** | CE, (UL-CSA 030F1-030FA-030FC-030FAA-030FCR only) |
| **Compliance with standards** | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| **Operating temperatures** | -25° ÷ +65°C |
| **Protection degree** | IP65 (IEC-EN60529) |
| **Mechanical durability** | 1.000.000 Operations |
| **Housing material** | PA Polyamide |
| **Knob or lever material** | PC Polycarbonate |
| **External bezel material** | Chromed zinc alloy |
| **Housing material** | PA Polyammide + chrome |
| **Fixing diameter** | 30.5mm - Thickness 1÷6mm |
| **Tightening torque** | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| **Protection against electric shock** | Class II (IEC-EN61140) |
| **Contact block** | Included |
| **Contact block characteristics** | See technical features of 030FAP - 030FCP - 030F1P |
| **Warranty period** | 18 months |

## Technical drawings

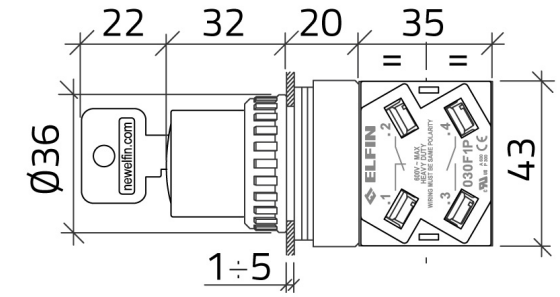


**CAM T**

