

## Scheda Dati

030SFCO4

Selettore a chiave, filo pannello, 3 posizioni, chiave K95, Cam O, estrazione chiave II





## Caratteristiche

|                         |                                                             |
|-------------------------|-------------------------------------------------------------|
| <b>Gamma</b>            | Selettori a chiave Ø 30                                     |
| <b>Componente</b>       | 3 posizioni                                                 |
| <b>Codice</b>           | 030SFCO4                                                    |
| <b>Descrizione</b>      | Selettore a chiave, filo pannello, 3 posizioni, chiave K95, |
| <b>Peso</b>             | 82,0                                                        |
| <b>Tariffa doganale</b> | 85365080                                                    |
| <b>GTIN</b>             | 8052878036379                                               |





## Dati tecnici

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| <b>Approvals</b>                         | CE, UL, CSA                                      |
| <b>Compliance with standards</b>         | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| <b>Compliance with standards</b>         | UNI CEI EN 45545-2, CEI EN 61373                 |
| <b>Operating temperatures</b>            | -25° ÷ +65°C                                     |
| <b>Environmental operating values</b>    | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)     |
| <b>Protection degree</b>                 | IP65 (IEC-EN60529)                               |
| <b>Protection against impact</b>         | IK04 (IEC-EN62262)                               |
| <b>Mechanical durability</b>             | 1.000.000 Operations                             |
| <b>Shock resistance</b>                  | 30g duration=18ms (EN-IEC 60068-2-27)            |
| <b>Shock resistance</b>                  | 50g duration=11ms (EN-IEC 60068-2-27)            |
| <b>Vibration resistance</b>              | 5g f= 2...500Hz (EN-IEC 60068-2-6)               |
| <b>Contact blocks configuration</b>      | Max no. 6 blocks (3+3)                           |
| <b>External bezel material</b>           | Anodized aluminum                                |
| <b>Knob or lever material</b>            | PA Polyamide                                     |
| <b>Locking ring material</b>             | Zamak zinc alloy                                 |
| <b>Fixing diameter</b>                   | 30.5mm - Thickness 1÷6mm                         |
| <b>Tightening torque</b>                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                      |
| <b>Protection against electric shock</b> | Class I (IEC-EN61140)                            |
| <b>Warranty period</b>                   | 18 months                                        |

# Disegni tecnici

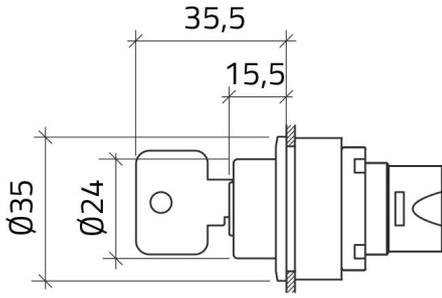

## CAM O



020E10  
020E10  
020G

