

Datenblatt

030SFPLOBC

Beleuchteter Drehknopf-Wahlschalter, weiß, flächenbündig, 3 Positionen, Cam O, Federrückführung zur Mitte



Merkmale

Baureihe	Beleuchtete Drehknopf-Wahlschalter Ø 30
Komponenten	Drehknopf-Wahlschalter 3 Positionen
Artikel-Nr.	030SFPLOBC
Beschreibung	Beleuchteter Drehknopf-Wahlschalter, weiß, flächenbündig, 3 Positionen, Cam O, Federrückführung zur Mitte
Farbe	Bianco
Gewicht - gr	36,0
Zolltarifnummer	85365080
GTIN	8052878037536



Technische Daten

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-25° ÷ +65°C
Environmental operating values	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Protection degree	IP65 (IEC-EN60529)
Protection against impact	IK04 (IEC-EN62262)
Mechanical durability	1.000.000 Operations
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Contact blocks configuration	Max no. 4 blocks (2+2)
Knob or lever material	PC Polycarbonate
External bezel material	Anodized aluminum
Locking ring material	Zamak zinc alloy
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Illuminated selector switch (all versions)	It is mandatory to use LED bulbs type 010BA9SLxxx
Protection against electric shock	Class I (IEC-EN61140)



Warranty period

18 months

Technische Zeichnungen

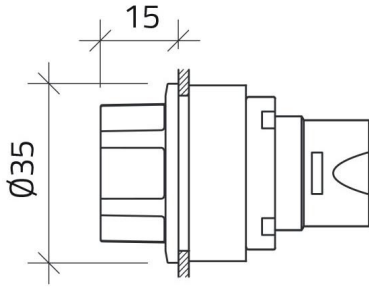

CAM O



020E10
020E10
020PD9

