

Scheda Dati

030SFPLOVC

Seletor luminoso com manípulo , verde, fio painel, 3 posições, Cam O, retorno ao centro





Caratteristiche

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| Gama             | Seletores luminosos de manípulo Ø 30                                                    |
| Componente       | Seletores com manípulo 3 posições                                                       |
| Código           | 030SFPLOVC                                                                              |
| Descrição        | Seletor luminoso com manípulo , verde, fio painel, 3 posições, Cam O, retorno ao centro |
| Cor              | Verde                                                                                   |
| Peso             | 36,0                                                                                    |
| Tariffa doganale | 85365080                                                                                |
| GTIN             | 8052878037598                                                                           |



Dati tecnici

|                                            |                                                   |
|--------------------------------------------|---------------------------------------------------|
| Approvals                                  | CE, UL, CSA                                       |
| Compliance with standards                  | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2  |
| Compliance with standards                  | UNI CEI EN 45545-2, CEI EN 61373                  |
| Operating temperatures                     | -25° ÷ +65°C                                      |
| Environmental operating values             | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)      |
| Protection degree                          | IP65 (IEC-EN60529)                                |
| Protection against impact                  | IK04 (IEC-EN62262)                                |
| Mechanical durability                      | 1.000.000 Operations                              |
| Shock resistance                           | 30g duration=18ms (EN-IEC 60068-2-27)             |
| Shock resistance                           | 50g duration=11ms (EN-IEC 60068-2-27)             |
| Vibration resistance                       | 5g f= 2...500Hz (EN-IEC 60068-2-6)                |
| Contact blocks configuration               | Max no. 4 blocks (2+2)                            |
| Knob or lever material                     | PC Polycarbonate                                  |
| External bezel material                    | Anodized aluminum                                 |
| Locking ring material                      | Zamak zinc alloy                                  |
| Fixing diameter                            | 30.5mm - Thickness 1÷6mm                          |
| Tightening torque                          | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                       |
| Illuminated selector switch (all versions) | It is mandatory to use LED bulbs type 010BA9SLxxx |
| Protection against electric shock          | Class I (IEC-EN61140)                             |
| Warranty period                            | 18 months                                         |

Disegni tecnici

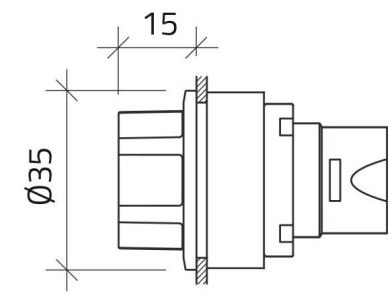

CAM O



020E10  
020E10  
020PD9

