

## Datenblatt

050LQL26-24

Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm, L 285 mm, mit Verbinder



## Merkmale

|                        |   |
|------------------------|---|
| <b>Baureihe</b>        | Neu Zusammenstellbare Meldeleuchtensäulen E-light 26                  |
| <b>Komponenten</b>     | Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm                          |
| <b>Artikel-Nr.</b>     | 050LQL26-24   |
| <b>Beschreibung</b>    | Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm, L 285 mm, mit Verbinder |
| <b>Farbe</b>           | Grigio RAL7016  |
| <b>Gewicht - gr</b>    | 246,0   |
| <b>Zolltarifnummer</b> | 85395200  |
| <b>GTIN</b>            | 8052878068028   |

## Dati tecnici



|  |  |
|--|--|
| <b>Approvals</b>                               | CE   |
| <b>Compliance with standards</b>               | IEC-EN60598-1, IEC-EN60598-2-1             |
| <b>Compliance with standards</b>               | IEC-EN62471                                |
| <b>Compliance to EMC standards</b>             | EN55015, EN61000-3-2, EN61000-3-3, EN61547 |
| <b>Compliance to directives</b>                | 2014/35/EU, 2014/30/EU, RoHS 2011/65/EU    |
| <b>Operating temperatures</b>                  | -30° ÷ +50°C                               |
| <b>Environmental operating values</b>          | all climates +40°C and 92% RH              |
| <b>Storage temperatures</b>                    | -30° ÷ +70°C                               |
| <b>Protection degree</b>                       | IP40 (IEC-EN60529)                         |
| <b>Protection against impact</b>               | IK06 (IEC-EN62262)                         |
| <b>Housing material</b>                        | PA Polyamide / PC polycarbonate            |
| <b>Protection against electric shock</b>       | Class II (IEC-EN61140)                     |
| <b>LED light intensity - power consumption</b> | 900 Lumen - 7W                             |
| <b>Operating voltage</b>                       | 24V AC/DC - tolerance +/- 10%              |
| <b>LED electrical life</b>                     | 60.000 hour                                |
| <b>LED colour temperature</b>                  | 4000 K                                     |
| <b>Rated insulation voltage</b>                | Ui 300V                                    |
| <b>On-Off switch</b>                           | Built-in, capacitive touch sensor          |
| <b>Light distribution</b>                      | Rotation of 180° - adjustable              |
| <b>Installation type</b>                       | Screw-fastening (screws included)          |

---

|                                      |  |
|--------------------------------------|--|
| <b>Installation type (accessory)</b> | By magnetic attachment to surface              |
| <b>Power supply connector</b>        | 050C7V2 included,suitable for single wiring or |
| <b>Power supply connector</b>        | sequential wiring of n°5 lamps max.            |
| <b>Accessory</b>                     | 050KFM magnetic mounting kit                   |
| <b>Warranty period</b>               | 18 months                                      |

---

## Disegni tecnici

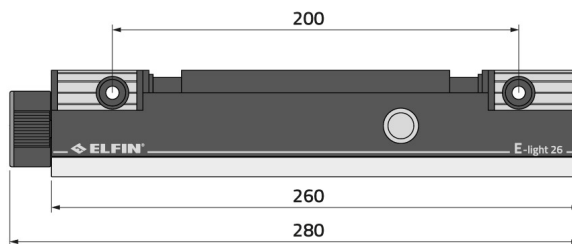

● 110-240 VAC  
50-60 Hz

● 24V AC/DC  
50-60 Hz