

Datenblatt

050LQL26-24UL

Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm, L 285 mm, mit Verbinder, Typgenehmigung UL-CSA



Merkmale



Baureihe	Neu Zusammenstellbare Meldeleuchtensäulen E-light 26
Komponenten	Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm
Artikel-Nr.	050LQL26-24UL
Beschreibung	Lineare Led-Deckenleuchte, 24V AC/DC, 900 lm, L 285 mm, mit Verbinder, Typgenehmigung UL-CSA
Farbe	Grigio RAL7016
Gewicht - gr	327,0
Zolltarifnummer	85395200
GTIN	8052878070052

Technische Daten

Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60598-1, IEC-EN60598-2-1
Compliance with standards	IEC-EN62471
Compliance to EMC standards	EN55015, EN61000-3-2, EN61000-3-3, EN61547
Compliance to directives	2014/35/EU, 2014/30/EU, RoHS 2011/65/EU
Operating temperatures	-30° ÷ +50°C
Environmental operating values	all climates +40°C and 92% RH
Storage temperatures	-30° ÷ +70°C
Protection degree	IP40 (IEC-EN60529)
Protection against impact	IK06 (IEC-EN62262)
Housing material	PA Polyamide / PC polycarbonate
Protection against electric shock	Class II (IEC-EN61140)
LED light intensity - power consumption	900 Lumen - 7W
Operating voltage	24V AC/DC - tolerance +/- 10%
LED electrical life	60.000 hour
LED colour temperature	4000 K
Rated insulation voltage	Ui 300V
On-Off switch	Built-in, capacitive touch sensor
Light distribution	Rotation of 180° - adjustable

Installation type	Screw-fastening (screws included)
Installation type (accessory)	By magnetic attachment to surface
Power supply connector	050C7V2 included,suitable for single wiring or
Power supply connector	sequential wiring of n°5 lamps max.
Accessory	050KFM magnetic mounting kit
Warranty period	18 months

Technische Zeichnungen

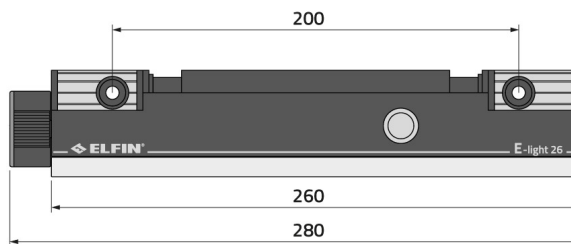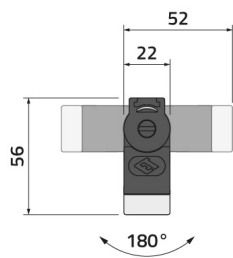

● 110-240 VAC
50-60 Hz

● 24V AC/DC
50-60 Hz