

## Scheda Dati

050LQL26-24UL

Plafoniera lineare a led, 24V AC/DC, 900 lm, L 285mm, con connettore, omologata UL-CSA



## Caratteristiche

<b>Gamma</b>	Nuove plafoniere elettroniche a led E-light 26
<b>Componente</b>	Plafoniera lineare a led, 24V AC/DC, 900 lm
<b>Codice</b>	050LQL26-24UL
<b>Descrizione</b>	Plafoniera lineare a led, 24V AC/DC, 900 lm,
<b>Colore</b>	Grigio RAL7016
<b>Peso</b>	327,0
<b>Tariffa doganale</b>	85395200
<b>GTIN</b>	8052878070052

## Dati tecnici



<b>Approvals</b>	CE, UL, CSA
<b>Compliance with standards</b>	IEC-EN60598-1, IEC-EN60598-2-1
<b>Compliance with standards</b>	IEC-EN62471
<b>Compliance to EMC standards</b>	EN55015, EN61000-3-2, EN61000-3-3, EN61547
<b>Compliance to directives</b>	2014/35/EU, 2014/30/EU, RoHS 2011/65/EU
<b>Operating temperatures</b>	-30° ÷ +50°C
<b>Environmental operating values</b>	all climates +40°C and 92% RH
<b>Storage temperatures</b>	-30° ÷ +70°C
<b>Protection degree</b>	IP40 (IEC-EN60529)
<b>Protection against impact</b>	IK06 (IEC-EN62262)
<b>Housing material</b>	PA Polyamide / PC polycarbonate
<b>Protection against electric shock</b>	Class II (IEC-EN61140)
<b>LED light intensity - power consumption</b>	900 Lumen - 7W
<b>Operating voltage</b>	24V AC/DC - tolerance +/- 10%
<b>LED electrical life</b>	60.000 hour
<b>LED colour temperature</b>	4000 K
<b>Rated insulation voltage</b>	Ui 300V
<b>On-Off switch</b>	Built-in, capacitive touch sensor
<b>Light distribution</b>	Rotation of 180° - adjustable
<b>Installation type</b>	Screw-fastening (screws included)

---

<b>Installation type (accessory)</b>	By magnetic attachment to surface
<b>Power supply connector</b>	050C7V2 included,suitable for single wiring or
<b>Power supply connector</b>	sequential wiring of n°5 lamps max.
<b>Accessory</b>	050KFM magnetic mounting kit
<b>Warranty period</b>	18 months

---

## Disegni tecnici

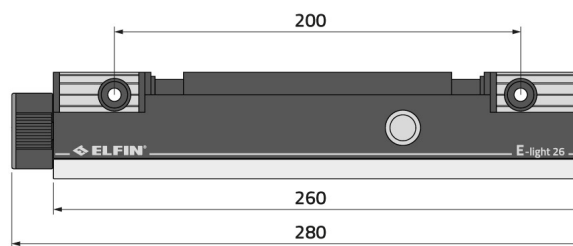

● 110-240 VAC  
50-60 Hz

● 24V AC/DC  
50-60 Hz