

## Hoja de datos

050LQL26-UL

Plafón lineal con led, 110-240V AC, 50/60HZ, 900 lm, L 285 mm, con conector, homologación UL-CSA



## Características

Rango	Nove plafones electrónicos con led E-light 26
Componente	Plafón lineal con led, 110÷240V AC, 50/60HZ, 900 lm
Código	050LQL26-UL
Descripción	Plafón lineal con led, 110-240V AC, 50/60HZ, 900 lm, L 285 mm, con conector, homologación UL-CSA
Color	Grigio RAL7016
Peso	333,0
Arancel aduanero	85395200
GTIN	8052878070045

## Datos técnicos



Approvals	CE, UL, CSA
Compliance with standards	IEC-EN60598-1, IEC-EN60598-2-1
Compliance with standards	IEC-EN62471
Compliance to EMC standards	EN55015, EN61000-3-2, EN61000-3-3, EN61547
Compliance to directives	2014/35/EU, 2014/30/EU, RoHS 2011/65/EU
Operating temperatures	-30° ÷ +50°C
Environmental operating values	all climates +40°C and 92% RH
Storage temperatures	-30° ÷ +70°C
Protection degree	IP40 (IEC-EN60529)
Protection against impact	IK06 (IEC-EN62262)
Housing material	PA Polyamide / PC polycarbonate
Protection against electric shock	Class II (IEC-EN61140)
LED light intensity - power consumption	900 Lumen - 6,5W
Operating voltage	110÷240V 50/60Hz - tolerance +/- 10%
LED electrical life	60.000 hour
LED colour temperature	4000 K
Rated insulation voltage	Ui 300V
On-Off switch	Built-in, capacitive touch sensor
Light distribution	Rotation of 180° - adjustable

---

<b>Installation type</b>	Screw-fastening (screws included)
<b>Installation type (accessory)</b>	By magnetic attachment to surface
<b>Power supply connector</b>	050C7V2 included,suitable for single wiring or
<b>Power supply connector</b>	sequential wiring of n°5 lamps max.
<b>Accessory</b>	050KFM magnetic mounting kit
<b>Warranty period</b>	18 months

---

## Dibujos técnicos

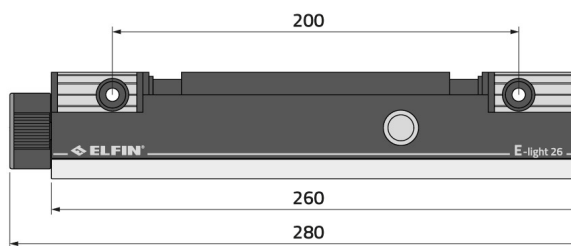

● 110-240 VAC  
50-60 Hz

● 24V AC/DC  
50-60 Hz