

Scheda Dati

060MEP2GR

Moduli singoli per comando a due mani, grigi termoplastico




Caratteristiche

| | |
|-------------------------|--|
| Gamma | Dispositivi di comando a due mani |
| Componente | Moduli singoli per comando a due mani in termoplastico |
| Codice | 060MEP2GR |
| Descrizione | Moduli singoli per comando a due mani, grigi |
| Colore | Grigio RAL7016 |
| Peso | 400,0 |
| Tariffa doganale | 85371098 |
| GTIN | 8052878067496 |

Dati tecnici

| | |
|--|---|
| Approvals | CE |
| Compliance with standards | IEC-ENC60947-1, IEC-EN60947-5-1 |
| Compliance with standards | IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851 |
| Operating temperatures | -25° ÷ +70°C |
| Protection degree | IP66 - IP69 (IEC-EN60529) |
| Protection against impact | IK05 (IEC-EN62262) |
| Housing material | High impact grade thermoplastic polymer |
| Manufacturing process | Injection moulding |
| Gasket material | TPE thermoplastic elastomer |
| Screw material | Stainless steel AISI 304 |
| Screw type | Torx T15 slotted head type |
| Tightening torque | 0.8 ÷ 1.2Nm (7.1 ÷ 10.6 Lb-in) |
| Protection against electric shock | Class II (IEC-EN61140) |
| Safety accessory | 060MCP2M - 2 hand simultaneous action controller |
| Pushbutton characteristics | See the single items 020PFGR and 020GE11 |
| Packaging | 2 modules (left - right unit) |
| Warranty period | 18 months |

Disegni tecnici

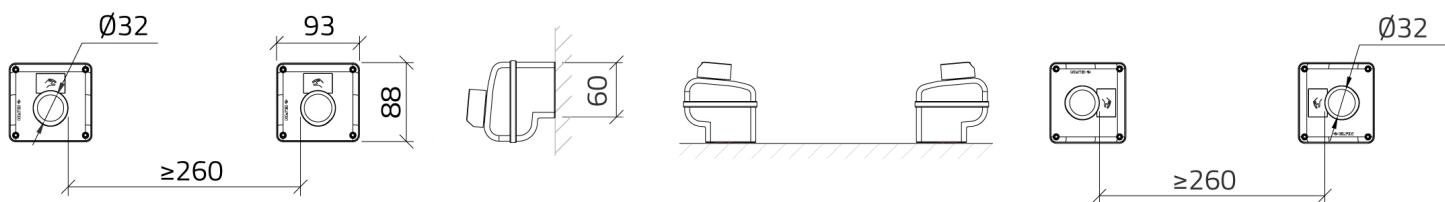

Unità 1 / Unit 1

Unità 2 / Unit 2

