

## Scheda Dati

060MEP2GR

Individuele modules 2-hand bedieningsstation, grijs, thermoplast




## Caratteristiche

<b>Bereik</b>	Tweehandenbediening
<b>Componente</b>	Individuele modules, 2-hand bediening, thermoplast
<b>Rubriek</b>	060MEP2GR
<b>Omschrijving</b>	Individuele modules 2-hand bedieningsstation, grijs, thermoplast
<b>Kleur</b>	Grigio RAL7016
<b>Peso</b>	400,0
<b>Tariffa doganale</b>	85371098
<b>GTIN</b>	8052878067496

## Dati tecnici

<b>Approvals</b>	CE
<b>Compliance with standards</b>	IEC-ENC60947-1, IEC-EN60947-5-1
<b>Compliance with standards</b>	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
<b>Operating temperatures</b>	-25° ÷ +70°C
<b>Protection degree</b>	IP66 - IP69 (IEC-EN60529)
<b>Protection against impact</b>	IK05 (IEC-EN62262)
<b>Housing material</b>	High impact grade thermoplastic polymer
<b>Manufacturing process</b>	Injection moulding
<b>Gasket material</b>	TPE thermoplastic elastomer
<b>Screw material</b>	Stainless steel AISI 304
<b>Screw type</b>	Torx T15 slotted head type
<b>Tightening torque</b>	0.8 ÷ 1.2Nm (7.1÷10.6 Lb-in)
<b>Protection against electric shock</b>	Class II (IEC-EN61140)
<b>Safety accessory</b>	060MCP2M - 2 hand simultaneous action controller
<b>Pushbutton characteristics</b>	See the single items 020PFGR and 020GE11
<b>Packaging</b>	2 modules (left - right unit)
<b>Warranty period</b>	18 months

## Disegni tecnici

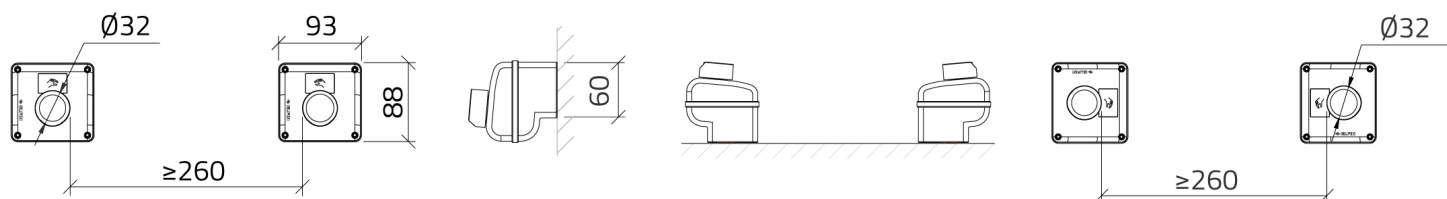

Unità 1 / Unit 1

Unità 2 / Unit 2

