

## Datablad

### 060MEP2GR

Individuele modules 2-hand bedieningsstation, grijs, thermoplast




## Kenmerken

|                     |  |
|---------------------|--|
| <b>Bereik</b>       | Tweehandenbediening  |
| <b>Component</b>    | Individuele modules, 2-hand bediening, thermoplast               |
| <b>Rubriek</b>      | 060MEP2GR  |
| <b>Omschrijving</b> | Individuele modules 2-hand bedieningsstation, grijs, thermoplast |
| <b>Kleur</b>        | Grigio RAL7016   |
| <b>Gewicht</b>      | 400,0  |
| <b>Douanetarief</b> | 85371098   |
| <b>GTIN</b>         | 8052878067496  |

## Technische gegevens

|  |   |
|--|---|
| <b>Approvals</b>                         | CE  |
| <b>Compliance with standards</b>         | IEC-ENC60947-1, IEC-EN60947-5-1                     |
| <b>Compliance with standards</b>         | IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851 |
| <b>Operating temperatures</b>            | -25° ÷ +70°C  |
| <b>Protection degree</b>                 | IP66 - IP69 (IEC-EN60529)                           |
| <b>Protection against impact</b>         | IK05 (IEC-EN62262)                                  |
| <b>Housing material</b>                  | High impact grade thermoplastic polymer             |
| <b>Manufacturing process</b>             | Injection moulding                                  |
| <b>Gasket material</b>                   | TPE thermoplastic elastomer                         |
| <b>Screw material</b>                    | Stainless steel AISI 304                            |
| <b>Screw type</b>                        | Torx T15 slotted head type                          |
| <b>Tightening torque</b>                 | 0.6 ÷ 0.8Nm (5.3÷7.1 Lb-in)                         |
| <b>Protection against electric shock</b> | Class II (IEC-EN61140)                              |
| <b>Safety accessory</b>                  | 060MCP2M - 2 hand simultaneous action controller    |
| <b>Pushbutton characteristics</b>        | See the single items 020PFGR and 020GE11            |
| <b>Packaging</b>                         | 2 modules (left - right unit)                       |
| <b>Warranty period</b>                   | 18 months   |

# Technische tekeningen

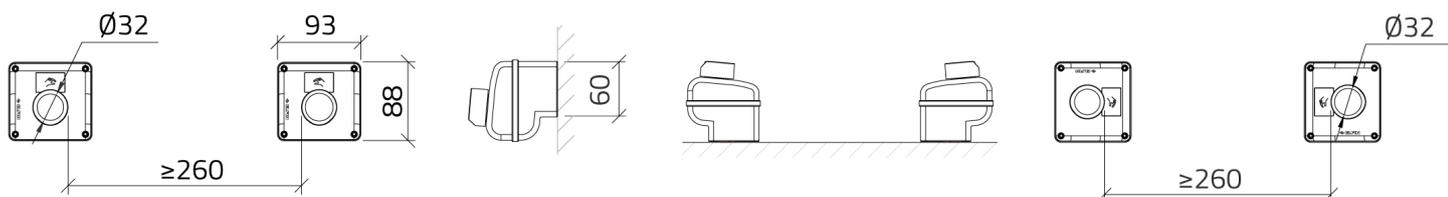

Unità 1 / Unit 1

Unità 2 / Unit 2

