

## Fiche technique

060MLP2GR

Modules simple pour commande bimanuelle, inclinés, gris, aluminium






## Caractéristiques

<b>Portée</b>	Dispositifs de commande à deux mains
<b>Composant</b>	Modules individuels inclinés, commande bimanuelle, aluminium
<b>Code</b>	060MLP2GR
<b>Désignation des marchandises</b>	Modules simple pour commande bimanuelle, inclinés, gris, aluminium
<b>Couleur</b>	Grigio RAL7016
<b>Poids</b>	1300,0
<b>Tarif douanier</b>	85371098
<b>GTIN</b>	8052878067489

## Données techniques

<b>Approvals</b>	CE
<b>Compliance with standards</b>	IEC-ENC60947-1, IEC-EN60947-5-1
<b>Compliance with standards</b>	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
<b>Operating temperatures</b>	-40° ÷ +70°C
<b>Protection degree</b>	IP66 - IP69 (IEC-EN60529)
<b>Manufacturing process</b>	Diecasting
<b>Enclosure material</b>	Aluminum Al Si11 Cu2 (EN AC46100)
<b>Gasket material</b>	Nitrile rubber
<b>Screw material</b>	Zamak zinc alloy
<b>Screw type</b>	M10 - slotted head type 6mm flat blade
<b>Tightening torque</b>	2,5Nm (22.1 Lb-in)
<b>Painting</b>	Polyester powder coating
<b>Rated insulation voltage</b>	Ui 690V - Uimp 4KV (IEC-EN60947-1)
<b>Protection against electric shock</b>	Class I (IEC-EN61140)
<b>Safety accessory</b>	060MCP2M - 2 hand simultaneous action controller
<b>Pushbutton characteristics</b>	See the single items 020PTFFGR and 020GE11
<b>Packaging</b>	2 modules (left - right unit)
<b>Warranty period</b>	18 months

## Dessins techniques

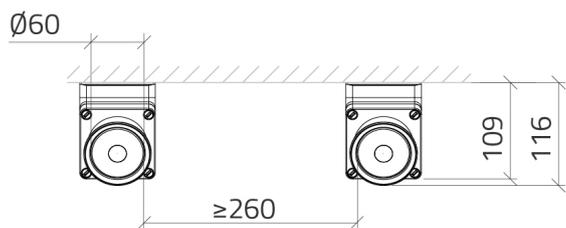

Unità 1 / Unit 1

Unità 2 / Unit 2

