

Fiche technique

060MLP2GR

Modules simple pour commande bimanuelle, inclinés, gris, aluminium






Caractéristiques

Portée	Dispositifs de commande à deux mains
Composant	Modules individuels inclinés, commande bimanuelle, aluminium
Code	060MLP2GR
Désignation des marchandises	Modules simple pour commande bimanuelle, inclinés, gris, aluminium
Couleur	Grigio RAL7016
Poids	1300,0
Tarif douanier	85371098
GTIN	8052878067489

Données techniques

Approvals	CE
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Compliance with standards	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
Operating temperatures	-40° ÷ +70°C
Protection degree	IP66 - IP69 (IEC-EN60529)
Manufacturing process	Diecasting
Enclosure material	Aluminum Al Si11 Cu2 (EN AC46100)
Gasket material	Nitrile rubber
Screw material	Zamak zinc alloy
Screw type	M10 - slotted head type 6mm flat blade
Tightening torque	2,5Nm (22.1 Lb-in)
Painting	Polyester powder coating
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class I (IEC-EN61140)
Safety accessory	060MCP2M - 2 hand simultaneous action controller
Pushbutton characteristics	See the single items 020PTFFGR and 020GE11
Packaging	2 modules (left - right unit)
Warranty period	18 months

Dessins techniques

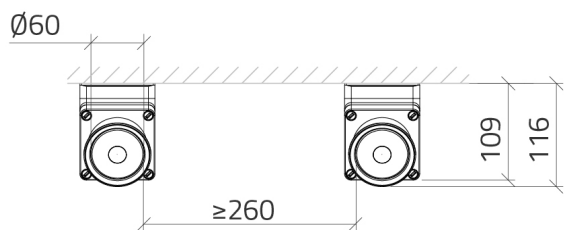

Unità 1 / Unit 1

Unità 2 / Unit 2

