# Scheda Dati

080R140-P1
Pulsantiera pensile remota 1 foro, grigio

## Caratteristiche

| | |
|---|---|
| **Gamma** | Pulsantiere pensili remote 140x83mm |
| **Componente** | Con 1 foro Ø 22 |
| **Codice** | 080R140-P1 |
| **Descrizione** | Pulsantiera pensile remota 1 foro, grigio |
| **Colore** | Grigio RAL7016 / Grigio RAL7035 |
| **Peso** | 210,0 |
| **Tariffa doganale** | 85381000 |
| **GTIN** | 8052878066109 |

## Dati tecnici

| | |
|---|---|
| **Approvals** | CE |
| **Compliance with standards** | IEC-ENC60947-1, IEC-EN60947-5-1, IEC-EN60204-1 |
| **Operating temperatures** | -35° ÷ +80°C |
| **Protection degree** | IP66 - IP69 (IEC-EN60529) |
| **Protection against impact** | IK08 (IEC-EN62262) |
| **Housing material** | High impact grade thermoplastic polymer |
| **Manufacturing process** | Injection moulding |
| **Gasket material** | TPE thermoplastic elastomer |
| **Screw material** | Stainless steel AISI 304 |
| **Screw type** | Torx T15 slotted head type |
| **Tightening torque** | 0.6 ÷ 0.8Nm (5.3÷7.1 Lb-in) |
| **Cable clamp screw** | Tightening torque 1.5Nm (13.3 Lb-in) max. |
| **Pendant fixing ring** | Stainless steel AISI 304 |
| **Flexible cable gland** | M16x1.5 suitable for cable D.5÷10mm |
| **Rated insulation voltage** | Ui 300V - Uimp 2.5KV (IEC-EN60947-1) |
| **Protection against electric shock** | Class II (IEC-EN61140) |
| **Combustion behaviour** | HB (UL94) |
| **Combustion behaviour** | 650°(IEC-EN60695-2-12) |
| **Fitted for outdoor application** | yes |
| **Pushbutton and electrical contacts block** | See 020 product range: 020 SM2 D.22mm |
| **Warranty period** | 18 months |
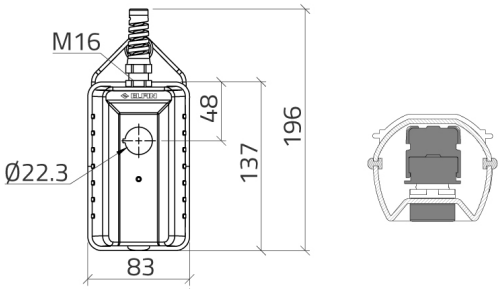
## Disegni tecnici