

Datenblatt

080R140GP3P33F

Hängetaster Fernbedienung mit Freigabeschalter mit Frontring , 3 Positionen, 3NO+3NC
Faston-Anschlüsse 2.8 x 0.5



Merkmale





Baureihe	Hängetaster, Fernbedienung 140x83 mm
Komponenten	Vollständige
Artikel-Nr.	080R140GP3P33F
Beschreibung	Hängetaster Fernbedienung mit Freigabeschalter mit Frontring , 3 Positionen, 3NO+3NC Faston-Anschlüsse 2.8 x 0.5
Farbe	Giallo RAL1003 / Grigio RAL7035
Gewicht - gr	298,0
Zolltarifnummer	85371098
GTIN	8052878066987

Technische Daten

Approvals	CE
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Compliance with standards	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
Compliance with standards	IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161
Compliance with standards	IEC-EN62208
Operating temperatures	-30° ÷ +70°C
Protection degree	IP66 - IP69 (IEC-EN60529)
Protection against impact	IK04 (IEC-EN62262)
Housing material	High impact grade thermoplastic polymer
Manufacturing process	Injection moulding
Gasket material	TPE thermoplastic elastomer
Screw material	Stainless steel AISI 304
Screw type	Torx T15 slotted head type
Tightening torque	0.6 ÷ 0.8Nm (5.3÷7.1 Lb-in)
Cable clamp screw	Tightening torque 1.5Nm (13.3 Lb-in) max.
Pendant fixing ring	Stainless steel AISI 304
Flexible cable gland	M16x1.5 suitable for cable D.5÷10mm
Rated insulation voltage	Ui 300V - Uimp 2.5KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)

Combustion behaviour	HB (UL94)
Combustion behaviour	650°(IEC-EN60695-2-11)
Fitted for outdoor application	yes
Pushbutton characteristics	See items 020PTAR - 020GE01 - 016P3PCG33F
Warranty period	18 months

Technische Zeichnungen

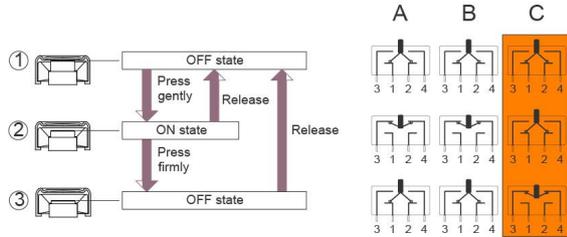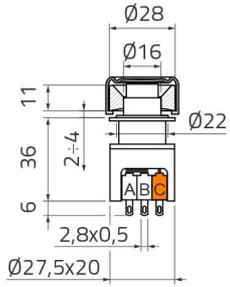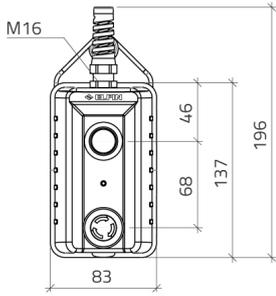

1-2 contatto NC / 3-4 contatto NA
1-2 NC contact / 3-4 NO contact

