

## Scheda Dati

080R140GP3P33F

Estações de controle pendentes, controle remoto com botão de habilitação 3 posições, 3NO+3NC terminais Festão



## Caratteristiche

<b>Gama</b>	Estações de controle pendentes, controle remoto 140x83 mm
<b>Componente</b>	Completa
<b>Código</b>	080R140GP3P33F
<b>Descrição</b>	Estações de controle pendentes, controle remoto com botão de habilitação 3 posições, 3NO+3NC terminais Festão
<b>Cor</b>	Giallo RAL1003 / Grigio RAL7035
<b>Peso</b>	130,0
<b>Tariffa doganale</b>	85371098
<b>GTIN</b>	8052878066987

## Dati tecnici





<b>Approvals</b>	CE
<b>Compliance with standards</b>	IEC-ENC60947-1, IEC-EN60947-5-1
<b>Compliance with standards</b>	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
<b>Compliance with standards</b>	IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161
<b>Compliance with standards</b>	IEC-EN62208
<b>Operating temperatures</b>	-30° ÷ +70°C
<b>Protection degree</b>	IP66 - IP69 (IEC-EN60529)
<b>Protection against impact</b>	IK04 (IEC-EN62262)
<b>Housing material</b>	High impact grade thermoplastic polymer
<b>Manufacturing process</b>	Injection moulding
<b>Gasket material</b>	TPE thermoplastic elastomer
<b>Screw material</b>	Stainless steel AISI 304
<b>Screw type</b>	Torx T15 slotted head type
<b>Tightening torque</b>	0.8 ÷ 1.2Nm (7.1÷10.6 Lb-in)
<b>Cable clamp screw</b>	Tightening torque 1.5Nm (13.3 Lb-in) max.
<b>Pendant fixing ring</b>	Stainless steel AISI 304
<b>Flexible cable gland</b>	M16x1.5 suitable for cable D.5÷10mm
<b>Rated insulation voltage</b>	Ui 300V - Uimp 2.5KV (IEC-EN60947-1)
<b>Protection against electric shock</b>	Class II (IEC-EN61140)

---

<b>Combustion behaviour</b>	HB (UL94)
<b>Combustion behaviour</b>	650°(IEC-EN60695-2-11)
<b>Fitted for outdoor application</b>	yes
<b>Pushbutton characteristics</b>	See items 020PTAR - 020GE01 - 016P3PCG33F
<b>Warranty period</b>	18 months

---

# Disegni tecnici

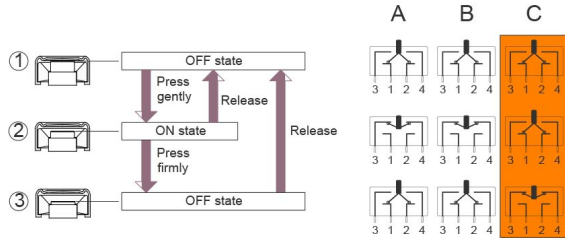

1-2 contatto NC / 3-4 contatto NA  
 1-2 NC contact / 3-4 NO contact

