# Datablad

080TU0927-7P7LC
Drukknopkast in PA + glasvezel 90x267x74, 7 gaten d22, UL



## Kenmerken

| | |
|---|---|
| **Bereik** | Drukknopkasten, Techno-serie 90x267 |
| **Component** | Deksel met 7 gaten D22 |
| **Rubriek** | 080TU0927-7P7LC |
| **Omschrijving** | Drukknopkast in PA + glasvezel 90x267x74, 7 gaten d22, UL |
| **Kleur** | Grigio RAL7016 / Grigio RAL7035 |
| **Gewicht** | 226,0 |
| **Douanetarief** | 85381000 |
| **GTIN** | 8052878076603 |

## Technische gegevens

| | |
|---|---|
| **Approvals** | CE, UL, CSA, EAC |
| **Compliance with standards** | IEC-EN62208, UL508, CSA C22.2 No.14-13 |
| **Operating temperatures** | -35° ÷ +80°C |
| **Protection against impact** | IK08 (IEC-EN62262) |
| **Protection degree** | IP66-IP67-IP69 -TYPE 4,4X (IEC-EN60529 - NEMA 250) |
| **Enclosure material** | PA Polyamide - glass fiber reinforced |
| **Gasket material** | TPE thermoplastic elastomer |
| **Screw material** | Stainless steel AISI 304 |
| **Screw type** | HEX 3 slotted head - M4 thread |
| **Threaded bushing material** | Stainless steel AISI 304 - M4 thread |
| **Enclosure thickness** | 3,5mm |
| **Tightening torque** | 0.8 ÷ 1.2 Nm (7.1 ÷ 10.6 Lb-in) |
| **Protection against electric shock** | Class II (IEC-EN61140) |
| **Heavy metal-free** | yes |
| **PVC-free** | yes |
| **Silicon-free** | yes |
| **Halogen-free** | yes |
| **Combustion behaviour** | 960°(IEC-EN60695-2-12) |
| **Fitted for outdoor application** | yes |
| **Combustion behaviour** | 5VA (UL94) |
| **Warranty period** | 18 months |
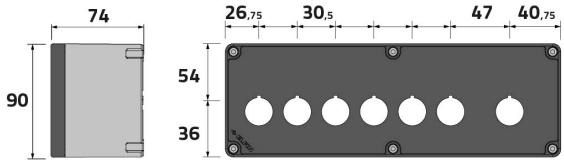
# Technische tekeningen