

## Scheda Dati

020MT4PGR

Manipulador, 4 posiciones, 4 permanentes, H 55







## Caratteristiche

|                         |  |
|-------------------------|--|
| <b>Rango</b>            | Manipuladores Ø 22                             |
| <b>Componente</b>       | Manipulador de 4 posiciones H 55 mm            |
| <b>Código</b>           | 020MT4PGR                                      |
| <b>Descripción</b>      | Manipulador, 4 posiciones, 4 permanentes, H 55 |
| <b>Color</b>            | Grigio RAL7035                                 |
| <b>Peso</b>             | 40,0   |
| <b>Tariffa doganale</b> | 85365080                                       |
| <b>GTIN</b>             | 8052878004767                                  |

## Dati tecnici

|                                       |  |
|---------------------------------------|--|
| <b>Approvals</b>                      | CE, UL, CSA                                      |
| <b>Compliance with standards</b>      | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| <b>Compliance with standards</b>      | UNI CEI EN 45545-2, CEI EN 61373                 |
| <b>Operating temperatures</b>         | -40° ÷ +70°C                                     |
| <b>Environmental operating values</b> | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)     |
| <b>Protection degree</b>              | IP66 - IP69 (IEC-EN60529)                        |
| <b>Protection against impact</b>      | IK03 (IEC-EN62262)                               |
| <b>Mechanical durability</b>          | 1.000.000 Operations                             |
| <b>Shock resistance</b>               | 30g duration=18ms (EN-IEC 60068-2-27)            |
| <b>Shock resistance</b>               | 50g duration=11ms (EN-IEC 60068-2-27)            |
| <b>Vibration resistance</b>           | 5g f= 2...500Hz (EN-IEC 60068-2-6)               |
| <b>Contact blocks configuration</b>   | Max no. 4 blocks (2+2)                           |
| <b>Material</b>                       | PA Polyamide                                     |
| <b>Cap or bellow material</b>         | Silicon rubber                                   |
| <b>Locking ring material</b>          | Zamak zinc alloy                                 |
| <b>Fixing diameter</b>                | 22.5mm - Thickness 1÷6mm                         |
| <b>Tightening torque</b>              | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                      |
| <b>Warranty period</b>                | 18 months  |

## Disegni tecnici

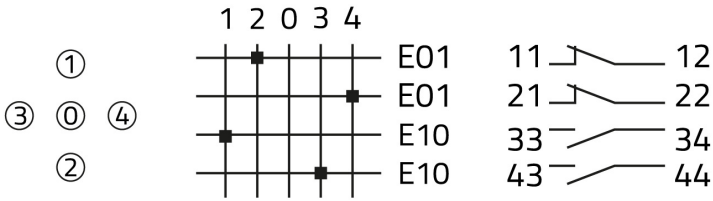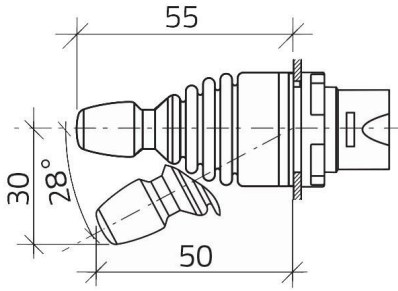

020G  
 020E01  
 020E01  
 020E10  
 020E10