

## Hoja de datos

### 020SMLOBC

Selectores luminosos rotatorio, blanco, 3 posiciones, Cam O, muelle con retorno al centro luminoso





## Características

|                         |  |
|-------------------------|--|
| <b>Rango</b>            | Selectores luminosos rotatorio Ø 22  |
| <b>Componente</b>       | Selectores luminosos rotatorio con 3 posiciones  |
| <b>Código</b>           | 020SMLOBC  |
| <b>Descripción</b>      | Selectores luminosos rotatorio, blanco, 3 posiciones, Cam O, muelle con retorno al centro luminoso |
| <b>Color</b>            | Bianco   |
| <b>Peso</b>             | 27,0   |
| <b>Arancel aduanero</b> | 85365080   |
| <b>GTIN</b>             | 8052878016241  |




## Datos técnicos

|   |   |
|---|---|
| <b>Approvals</b>                                  | CE, UL, CSA                                       |
| <b>Compliance with standards</b>                  | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2  |
| <b>Compliance with standards</b>                  | UNI CEI EN 45545-2, CEI EN 61373                  |
| <b>Operating temperatures</b>                     | -40° ÷ +70°C                                      |
| <b>Environmental operating values</b>             | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)      |
| <b>Protection degree</b>                          | IP66 - IP69 (IEC-EN60529)                         |
| <b>Protection against impact</b>                  | IK03 (IEC-EN62262)                                |
| <b>Mechanical durability</b>                      | 1.000.000 Operations                              |
| <b>Shock resistance</b>                           | 30g duration=18ms (EN-IEC 60068-2-27)             |
| <b>Shock resistance</b>                           | 50g duration=11ms (EN-IEC 60068-2-27)             |
| <b>Vibration resistance</b>                       | 5g f= 2...500Hz (EN-IEC 60068-2-6)                |
| <b>Contact blocks configuration</b>               | Max no. 2 blocks (1+1)                            |
| <b>Material</b>                                   | PA Polyamide                                      |
| <b>Locking ring material</b>                      | Zamak zinc alloy                                  |
| <b>Fixing diameter</b>                            | 22.5mm - Thickness 1÷6mm                          |
| <b>Tightening torque</b>                          | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                       |
| <b>Illuminated selector switch (all versions)</b> | It is mandatory to use LED bulbs type 010BA9SLxxx |
| <b>Protection against electric shock</b>          | Class II (IEC-EN61140)                            |
| <b>Warranty period</b>                            | 18 months   |

# Dibujos técnicos



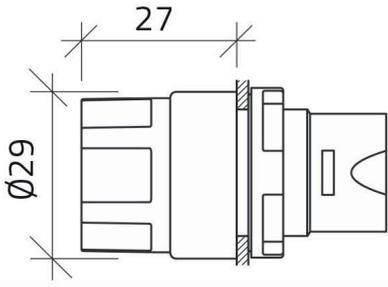


## CAM 0



020E10  
020E10  
020G

## CAM 0



020E01  
020E10  
020G

