

## Fiche technique

020STACTW5

Bouton tournant à clé, 3 positions, clé K95, Cam T, retrait clé I-0, métal




## Caractéristiques

|                                     |  |
|-------------------------------------|--|
| <b>Portée</b>                       | Boutons tournants à clé Ø 22 - collerette métallique                       |
| <b>Composant</b>                    | 3 positions  |
| <b>Code</b>                         | 020STACTW5   |
| <b>Désignation des marchandises</b> | Bouton tournant à clé, 3 positions, clé K95, Cam T, retrait clé I-0, métal |
| <b>Poids</b>                        | 95,0   |
| <b>Tarif douanier</b>               | 85365080   |
| <b>GTIN</b>                         | 8052878021245  |


## Données techniques

|  |  |
|--|--|
| <b>Approvals</b>                         | CE   |
| <b>Compliance with standards</b>         | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| <b>Compliance with standards</b>         | UNI CEI EN 45545-2                               |
| <b>Operating temperatures</b>            | -25° ÷ +65°C                                     |
| <b>Environmental operating values</b>    | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)     |
| <b>Protection degree</b>                 | IP65 (IEC-EN60529)                               |
| <b>Protection against impact</b>         | IK03 (IEC-EN62262)                               |
| <b>Mechanical durability</b>             | 1.000.000 Operations                             |
| <b>Shock resistance</b>                  | 30g duration=18ms (EN-IEC 60068-2-27)            |
| <b>Shock resistance</b>                  | 50g duration=11ms (EN-IEC 60068-2-27)            |
| <b>Vibration resistance</b>              | 5g f= 2...500Hz (EN-IEC 60068-2-6)               |
| <b>Contact blocks configuration</b>      | Max no. 4 blocks (2+2)                           |
| <b>Knob or lever material</b>            | PC Polycarbonate                                 |
| <b>External bezel material</b>           | Chromed zinc alloy                               |
| <b>Locking ring material</b>             | Zamak zinc alloy                                 |
| <b>Fixing diameter</b>                   | 22.5mm - Thickness 1÷6mm                         |
| <b>Tightening torque</b>                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                      |
| <b>Protection against electric shock</b> | Class II (IEC-EN61140)                           |
| <b>Warranty period</b>                   | 18 months  |

# Dessins techniques

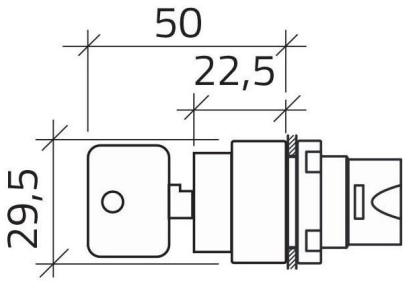

## CAM T



020E01  
020E10  
020G

