

Scheda Dati

020STACTW

Sleutelschakelaar, 3 posities, sleutel K95, Cam T, sleutel extractie I-0-II, metaal





Caratteristiche

| | |
|-------------------------|---|
| Bereik | Sleutelschakelaars Ø 22 ■ metalen ringmoer |
| Componente | Sleutelschakelaars 3 posities |
| Rubriek | 020STACTW |
| Omschrijving | Sleutelschakelaar, 3 posities, sleutel K95, Cam T, sleutel extractie I-0-II, metaal |
| Peso | 95,0 |
| Tariffa doganale | 85365080 |
| GTIN | 8052878021184 |


Dati tecnici

| | |
|--|--|
| Approvals | CE |
| Compliance with standards | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards | UNI CEI EN 45545-2 |
| Operating temperatures | -25° ÷ +65°C |
| Environmental operating values | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30) |
| Protection degree | IP65 (IEC-EN60529) |
| Protection against impact | IK03 (IEC-EN62262) |
| Mechanical durability | 1.000.000 Operations |
| Shock resistance | 30g duration=18ms (EN-IEC 60068-2-27) |
| Shock resistance | 50g duration=11ms (EN-IEC 60068-2-27) |
| Vibration resistance | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Contact blocks configuration | Max no. 4 blocks (2+2) |
| Knob or lever material | PC Polycarbonate |
| External bezel material | Chromed zinc alloy |
| Locking ring material | Zamak zinc alloy |
| Fixing diameter | 22.5mm - Thickness 1÷6mm |
| Tightening torque | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| Protection against electric shock | Class II (IEC-EN61140) |
| Warranty period | 18 months |

Disegni tecnici

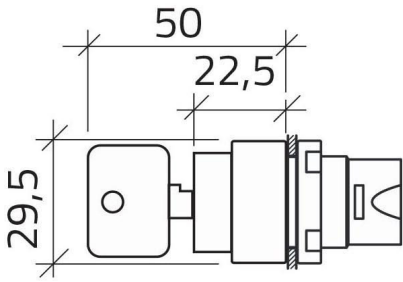

CAM T



020E01
020E10
020G

