

Datablad

030M2T22

Joystick, 2 posities, 2 Tijdelijke, 2 N.O.+2 N.C.








Kenmerken

Bereik	Joysticks Ø 30
Component	Joysticks 2 posities tijdelijke
Rubriek	030M2T22
Omschrijving	Joystick, 2 posities, 2 Tijdelijke, 2 N.O.+2 N.C.
Kleur	Nero
Gewicht	213,0
Douanetarief	85365080
GTIN	8052878029302

Technische gegevens

Approvals	CE, (UL-CSA Microswitch only)
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	2.000.000 Operations
Cap or bellow material	Silicon rubber
Housing material	PA Polyamide
External bezel material	Chromed zinc alloy
Internal parts material	Lever, springs, bushing - stainless steel AISI 304
Microswitches flange material	Stainless steel AISI 304
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Rated insulation voltage	Ui 300V - Uimp 2.5KV (IEC-EN60947-1)
Protection against electric shock	Class II (IEC-EN61140)
Microswitch contact form	SPDT (single pole double throw)
Microswitch terminals	Quick connect #250 (6.35mm)
Microswitch electrical ratings	250VAC - 15A (resistive load)
Microswitch electrical ratings	250VDC - 0.3A / 125VDC - 0.6A (resistive load)
Microswitch electrical durability	100.000 operations
Warranty period	18 months

Technische tekeningen

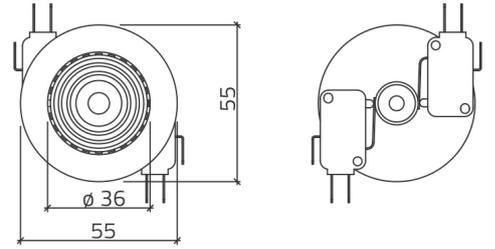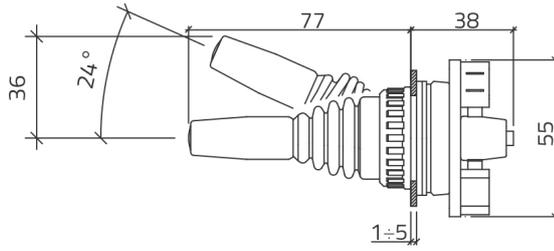

	8	6	4	2	0	1	3	5	7
MICROINTERRUTTORE MICROSWITCHES	1								
2									
3									
4									

