

Scheda Dati

030MF2T

Manipolatore, filo pannello, 2 posizioni, 2 Temporanee







Caratteristiche

| | |
|-------------------------|--|
| Gamma | Manipolatori Ø 30 |
| Componente | 2 posizioni |
| Codice | 030MF2T |
| Descrizione | Manipolatore, filo pannello, 2 posizioni, 2 Temporanee |
| Colore | Nero |
| Peso | 54,0 |
| Tariffa doganale | 85365080 |
| GTIN | 8052878029401 |

Dati tecnici

| | |
|--|--|
| Approvals | CE, UL, CSA |
| Compliance with standards | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2 |
| Compliance with standards | UNI CEI EN 45545-2, CEI EN 61373 |
| Operating temperatures | -25° ÷ +65°C |
| Protection degree | IP65 (IEC-EN60529) |
| Protection against impact | IK04 (IEC-EN62262) |
| Mechanical durability | 1.000.000 Operations |
| Shock resistance | 30g duration=18ms (EN-IEC 60068-2-27) |
| Shock resistance | 50g duration=11ms (EN-IEC 60068-2-27) |
| Vibration resistance | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Contact blocks configuration | Max no. 4 blocks (2+2) |
| Material | PA Polyamide |
| Cap or bellow material | Silicon rubber |
| External bezel material | Anodized aluminum |
| Internal parts material | Lever, springs, bushing - stainless steel AISI 304 |
| Internal parts material | Sliding bushing made in brass |
| Locking ring material | Zamak zinc alloy |
| Fixing diameter | 30.5mm - Thickness 1÷6mm |
| Tightening torque | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in) |
| Protection against electric shock | Class I (IEC-EN61140) |
| Warranty period | 18 months |

Disegni tecnici

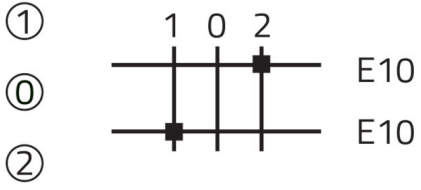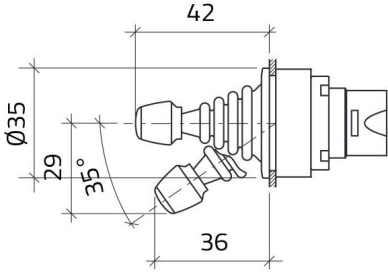

020E10
020E10
020G

