

Scheda Dati

060MLP2GR

Moduli singoli inclinati per comando a due mani, grigi, alluminio






Caratteristiche

Gamma	Dispositivi di comando a due mani
Componente	Moduli singoli inclinati per comando a due mani in alluminio
Codice	060MLP2GR
Descrizione	Moduli singoli inclinati per comando a due mani, grigi,
Colore	Grigio RAL7016
Peso	1300,0
Tariffa doganale	85371098
GTIN	8052878067489

Dati tecnici

Approvals	CE
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Compliance with standards	IEC-EN60204-1, UNI EN ISO 13849-1, UNI EN ISO 13851
Operating temperatures	-40° ÷ +70°C
Protection degree	IP66 - IP69 (IEC-EN60529)
Manufacturing process	Diecasting
Enclosure material	Aluminum Al Si11 Cu2 (EN AC46100)
Gasket material	Nitrile rubber
Screw material	Zamak zinc alloy
Screw type	M10 - slotted head type 6mm flat blade
Tightening torque	2,5Nm (22.1 Lb-in)
Painting	Polyester powder coating
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class I (IEC-EN61140)
Safety accessory	060MCP2M - 2 hand simultaneous action controller
Pushbutton characteristics	See the single items 020PTFFGR and 020GE11
Packaging	2 modules (left - right unit)
Warranty period	18 months

Disegni tecnici

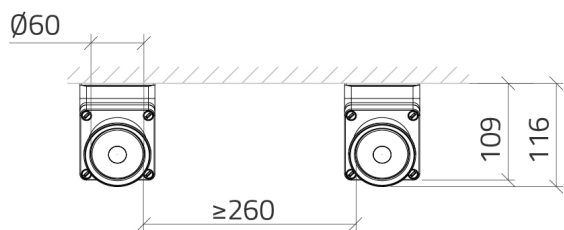

Unità 1 / Unit 1

Unità 2 / Unit 2

