

Scheda Dati

060MLP2GR

Módulos únicos inclinados para comando bimanual, cinza, alumínio




Caratteristiche

Gama	Dispositivos de comando a duas mãos
Componente	Módulos únicos inclinados para comando bimanual em alumínio
Código	060MLP2GR
Descrição	Módulos únicos inclinados para comando bimanual, cinza, alumínio
Cor	Grigio RAL7016
Peso	1300,0
Tariffa doganale	85371098
GTIN	8052878067489

Dati tecnici

Approvals	CE
Compliance with standards	IEC-ENC60947-1, IEC-EN60947-5-1
Compliance with standards	IEC-EN60204-1,UNI EN ISO 13849-1,UNI EN ISO 13851
Operating temperatures	-40° ÷ +70°C
Protection degree	IP66 - IP69 (IEC-EN60529)
Manufacturing process	Diecasting
Enclosure material	Aluminum Al Si11 Cu2 (EN AC46100)
Gasket material	Nitrile rubber
Screw material	Zamak zinc alloy
Screw type	M10 - slotted head type 6mm flat blade
Tightening torque	2,5Nm (22.1 Lb-in)
Painting	Polyester powder coating
Rated insulation voltage	Ui 690V - Uimp 4KV (IEC-EN60947-1)
Protection against electric shock	Class I (IEC-EN61140)
Safety accessory	060MCP2M - 2 hand simultaneous action controller
Pushbutton characteristics	See the single items 020PTFFGR and 020GE11
Packaging	2 modules (left - right unit)
Warranty period	18 months

Disegni tecnici

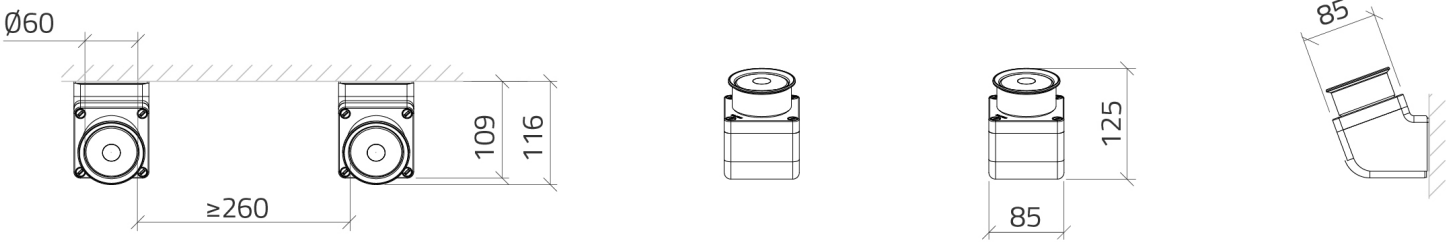

Unità 1 / Unit 1 Unità 2 / Unit 2

